



## 1. Description

JR9N90, the silicon N-channel Enhanced MOSFETs, is obtained by advanced MOSFET technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor is suitable device for SMPS, high speed switching and general purpose applications.

### KEY CHARACTERISTICS


Parameter	Value	Unit
V <sub>DS</sub> @T <sub>j</sub> .max	900	V
I <sub>D</sub>	9	A
R <sub>DS(ON).Typ</sub>	0.83	Ω

### FEATURES

- Fast Switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product


### APPLICATIONS

- High frequency switching mode power supply

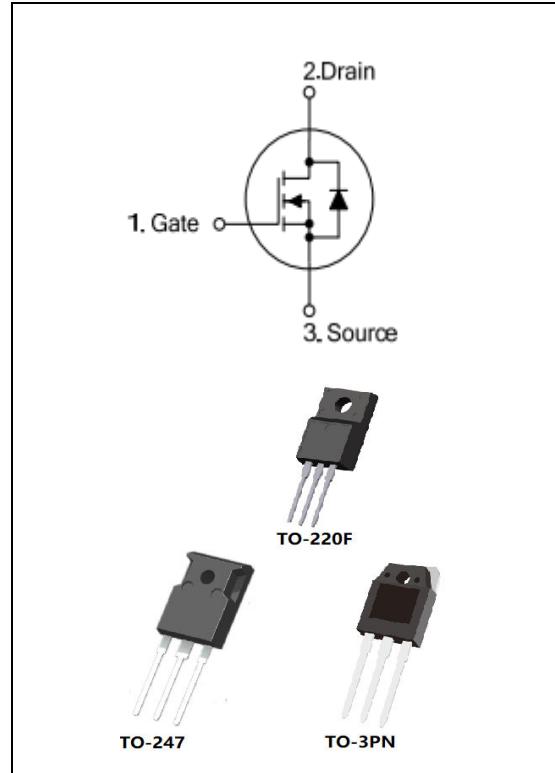

## ORDERING INFORMATION

Ordering Codes	Package	Product Code	Packing
JR9N90-A	TO-220F	9N90	Tube
JR9N90-W	TO-3PN		Tube
JR9N90-F	TO-247		Tube

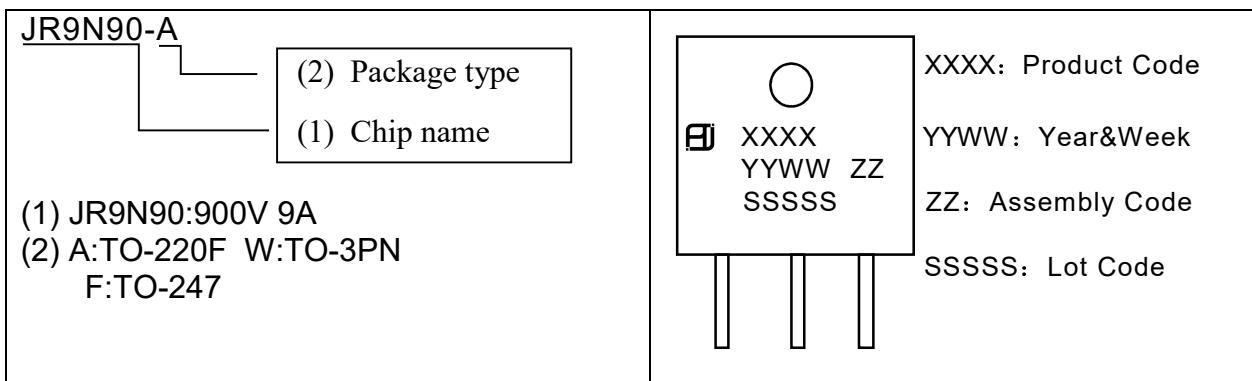



上海捷瑞德半导体  
Jerrett Semiconductor

**JR9N90**  
Power MOSFET

## 2. ABSOLUTE RATINGS

at  $T_c = 25^\circ\text{C}$ , unless otherwise specified

Symbol	Parameter	Rating	Units
$V_{DSS}$	Drain-to-Source Voltage	900	V
$I_D$	Continuous Drain Current	9	A
	Continuous Drain Current $T_c = 100^\circ\text{C}$	5.6	A
$I_{DM}$	Pulsed Drain Current(Note1)	36	A
$V_{GS}$	Gate-to-Source Voltage	$\pm 30$	V
$E_{AS}$	Single Pulse Avalanche Energy(Note2)	1000	mJ
$dv/dt$	Peak Diode Recovery $dv/dt$ (Note3)	4.0	V/ns
$P_D$	Power Dissipation TO-247 TO-3PN	230	W
	Derating Factor above $25^\circ\text{C}$	1.8	W/ $^\circ\text{C}$
$P_D$	Power Dissipation TO-220F	50	W
	Derating Factor above $25^\circ\text{C}$	0.4	W/ $^\circ\text{C}$
$T_J, T_{stg}$	Operating Junction and Storage Temperature Range	150, -55 to 150	$^\circ\text{C}$
$T_L$	Maximum Temperature for Soldering	300	$^\circ\text{C}$

## 3. Thermal characteristics

### Thermal characteristics TO-247 TO-3PN

Symbol	Parameter	RATINGS	Units
$R_{\theta JC}$	Junction-to-Case	0.54	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient	62.5	$^\circ\text{C}/\text{W}$

### Thermal characteristics TO-220F

Symbol	Parameter	RATINGS	Units
$R_{\theta JC}$	Junction-to-Case	2.5	$^\circ\text{C}/\text{W}$
$R_{\theta JA}$	Junction-to-Ambient	62.5	$^\circ\text{C}/\text{W}$



#### 4. Electrical Characteristics

at  $T_c = 25^\circ\text{C}$ , unless otherwise specified

OFF Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$V_{DSS}$	Drain to Source Breakdown Voltage	$V_{GS}=0\text{V}$ , $I_D=250\mu\text{A}$	900	--	--	V
$\Delta V_{DSS}/\Delta T_J$	Bvdss Temperature Coefficient	$ID=250\mu\text{A}$ , Reference $25^\circ\text{C}$	--	1	--	$\text{V}/^\circ\text{C}$
$I_{DSS}$	Drain to Source Leakage Current	$V_{DS}=900\text{V}$ , $V_{GS}=0\text{V}$ , $T_j = 25^\circ\text{C}$	--	--	1	$\mu\text{A}$
		$V_{DS}=720\text{V}$ , $V_{GS}=0\text{V}$ , $T_j = 125^\circ\text{C}$	--	--	10	$\mu\text{A}$
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS} = +30\text{V}$	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS} = -30\text{V}$	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10\text{V}$ , $ID=4.5\text{A}$ (Note4)	--	0.83	1.0	$\Omega$
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$ , $ID = 250\mu\text{A}$ (Note4)	3.0	--	5.0	V

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$R_g$	Gate resistance	$f = 1.0\text{MHz}$	--	0.9	--	$\Omega$
$C_{iss}$	Input Capacitance	$V_{GS} = 0\text{V}$ $V_{DS} = 25\text{V}$ $f = 1.0\text{MHz}$	--	2510	--	PF
$C_{oss}$	Output Capacitance		--	195	--	
$C_{rss}$	Reverse Transfer Capacitance		--	10	--	



### Switching Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	ID =9A VDD = 450V VGS = 10V RG =20Ω	--	55	--	ns
$t_r$	Rise Time		--	103	--	
$t_{d(OFF)}$	Turn-Off Delay Time		--	110	--	
$t_f$	Fall Time		--	73	--	
$Q_g$	Total Gate Charge	ID =9A VDD =720V VGS = 10V	--	52	--	nC
$Q_{gs}$	Gate to Source Charge		--	13	--	
$Q_{gd}$	Gate to Drain ("Miller")Charge		--	15	--	

### Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$I_s$	Continuous Source Current (Body Diode)	TC=25 °C	--	--	9	A
$I_{SM}$	Maximum Pulsed Current (Body Diode)		--	--	36	A
$V_{SD}$	Diode Forward Voltage	IS=9A, VGS=0V(Note4)	--	--	1.2	V
$T_{rr}$	Reverse Recovery Time	IS=9A, Tj = 25°C	--	610	--	ns
$Q_{rr}$	Reverse Recovery Charge	dIF/dt=100A/us, VGS=0V	--	5500	--	nC

Note1: Pulse width limited by maximum junction temperature

Note2: L=20mH, VDs=50V, Start TJ=25°C

Note3: ISD =9A,di/dt ≤100A/us,VDD≤BVDS, Start TJ=25°C

Note4: Pulse width tp≤300μs, δ≤2%



## 5. Characteristics Curves

Figure 1a Safe Operating Area (No FullPAK)

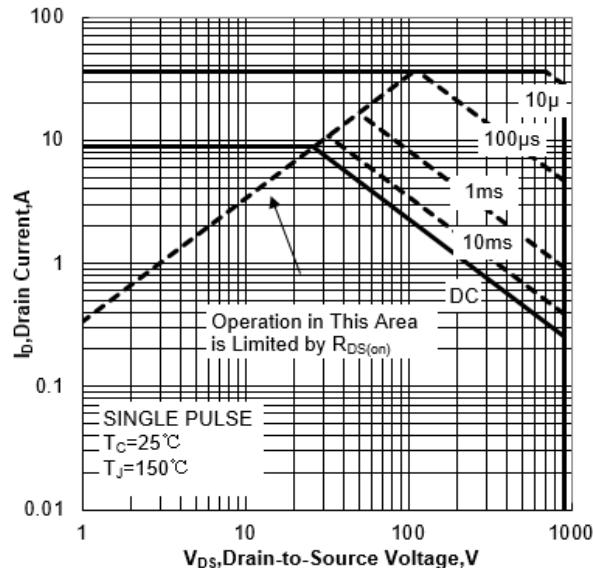


Figure 1b Safe Operating Area (FullPAK)

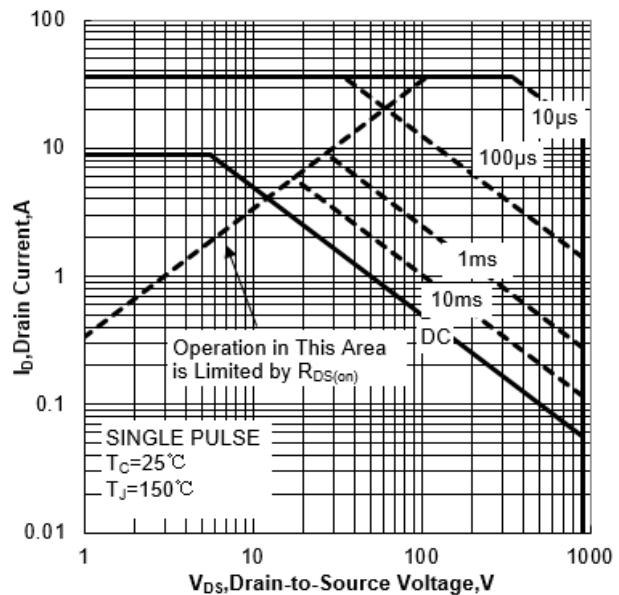


Figure 2a Power Dissipation (No FullPAK)


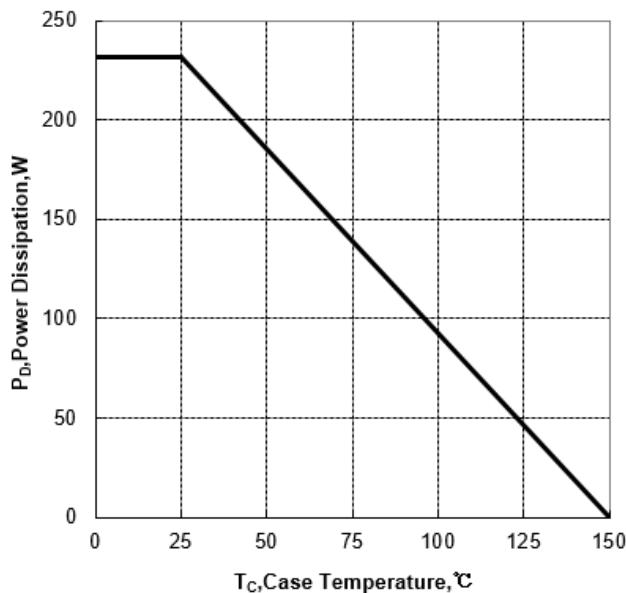


Figure 2b Power Dissipation (FullPAK)



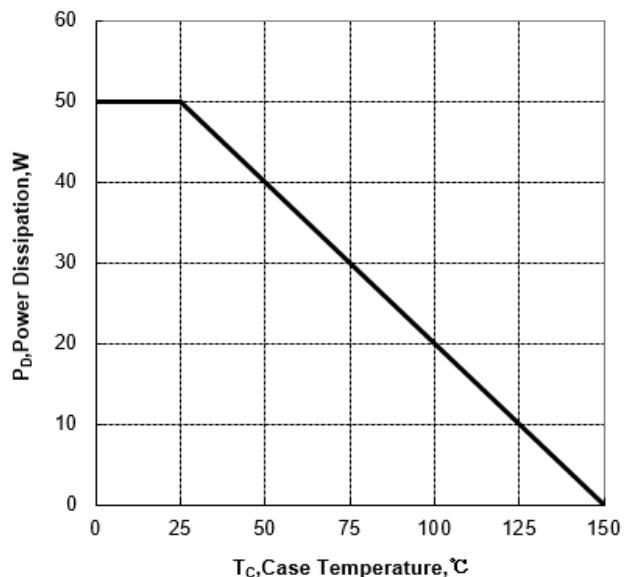

上海捷瑞德半导体  
Jerrett Semiconductor

JR9N90  
Power MOSFET

Figure 3a Max Thermal Impedance (No FullPAK)

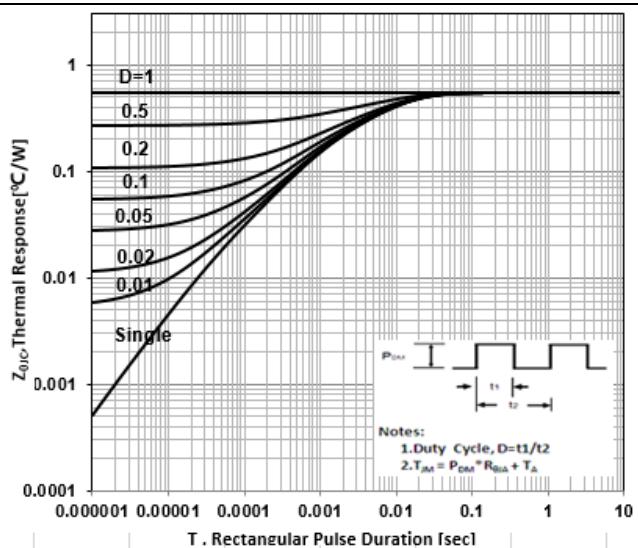


Figure 3b Max Thermal Impedance (FullPAK)

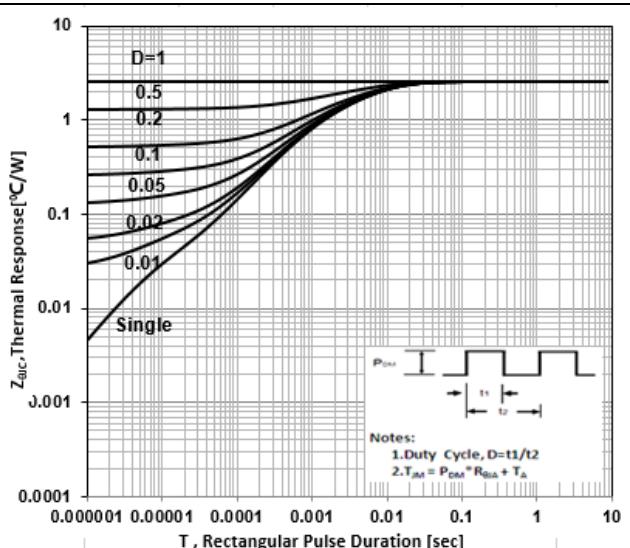


Figure 4 Typical Output Characteristics


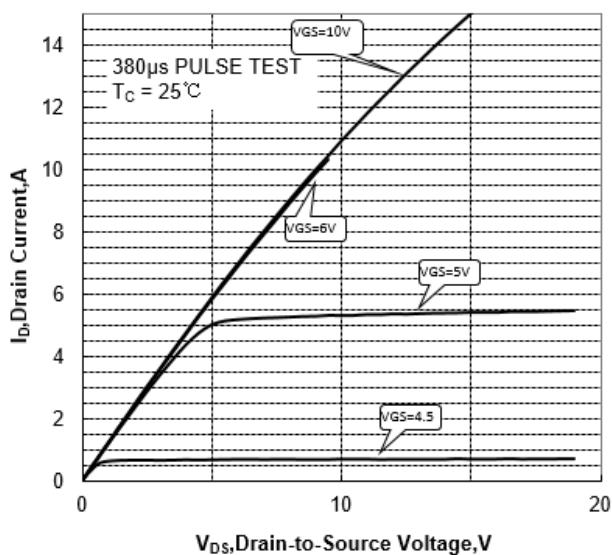


Figure 5 Typical Transfer Characteristics




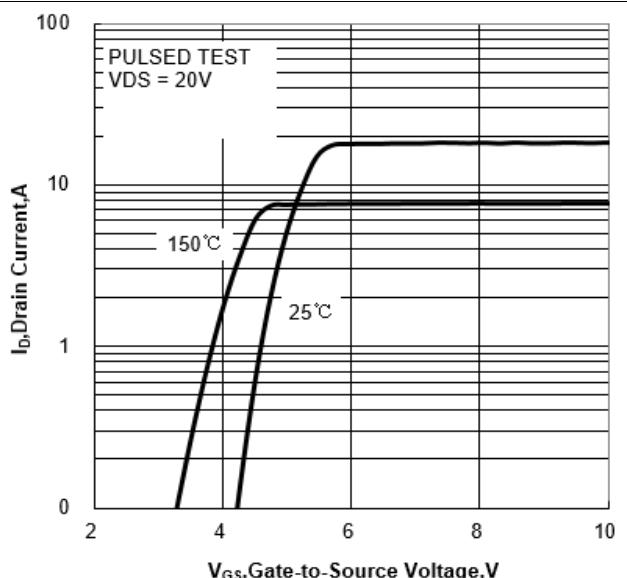


上海捷瑞德半导体  
Jerrett Semiconductor

**JR9N90**  
Power MOSFET


**Figure 6 Typical Drain to Source ON Resistance vs Drain Current**

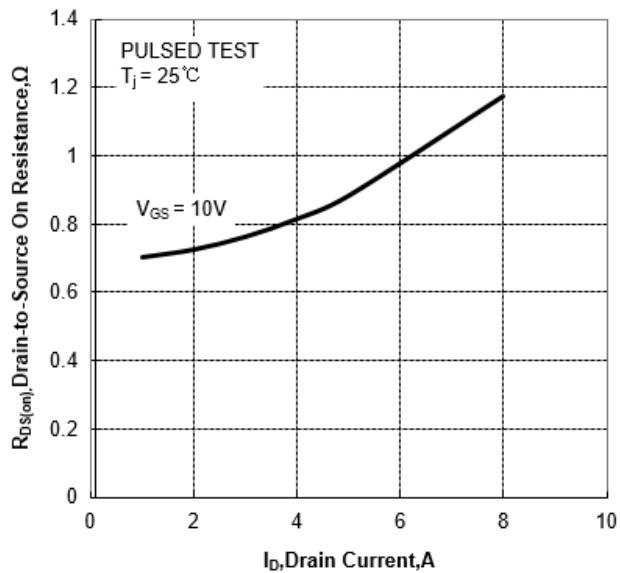

**Figure 7 Typical Drian to Source on Resistance vs Junction Temperature**

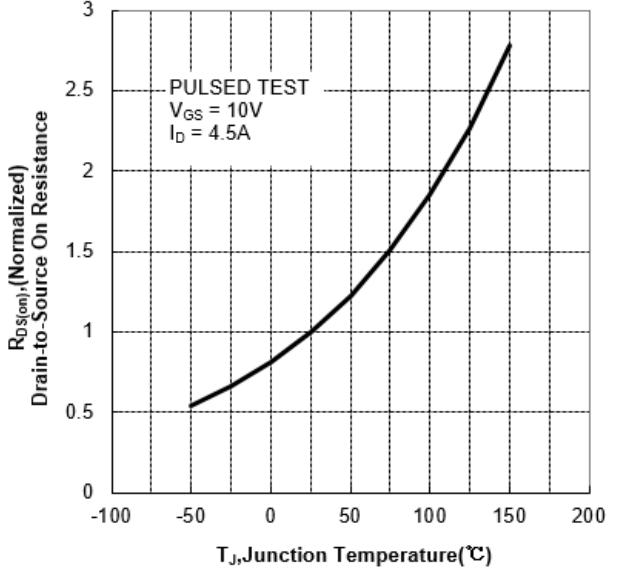

**Figure 8 Typical Threshold Voltage vs Junction Temperature**

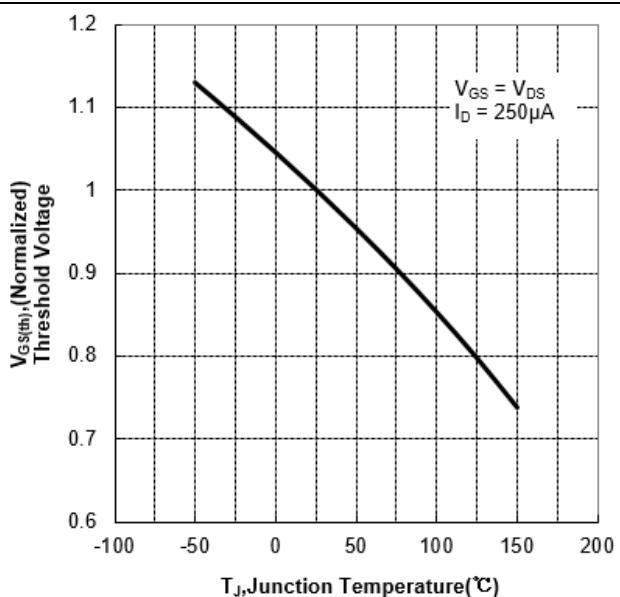

**Figure 9 Typical Breakdown Voltage vs Junction Temperature**

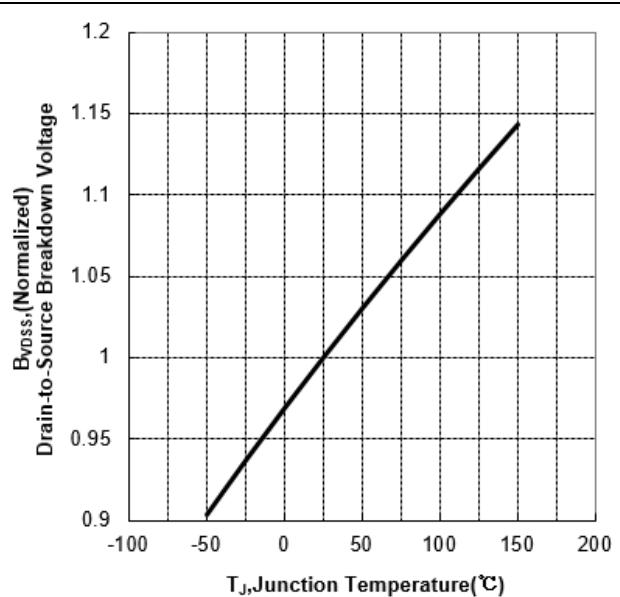




Figure 10 Typical Capacitance vs Drain to Source Voltage


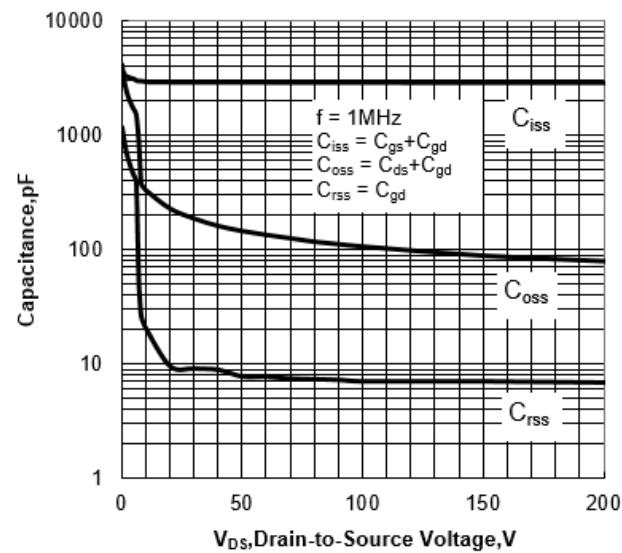


Figure 11 Typical Gate Charge vs Gate to Source Voltage



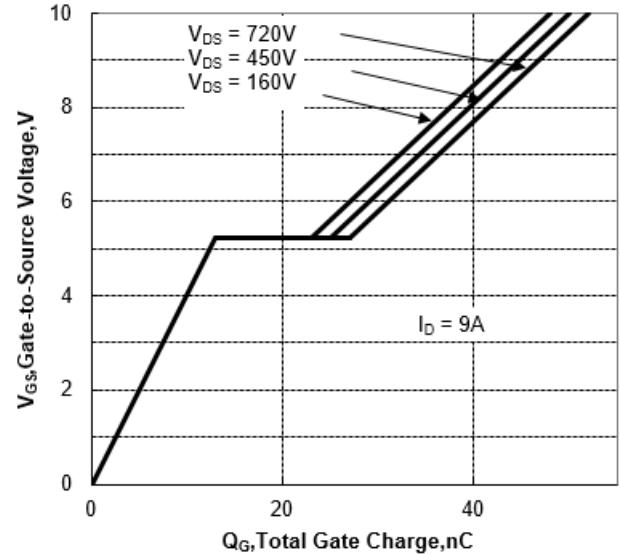

## 6. Test Circuit and Waveform

Figure 12 Gate Charge Test Circuit

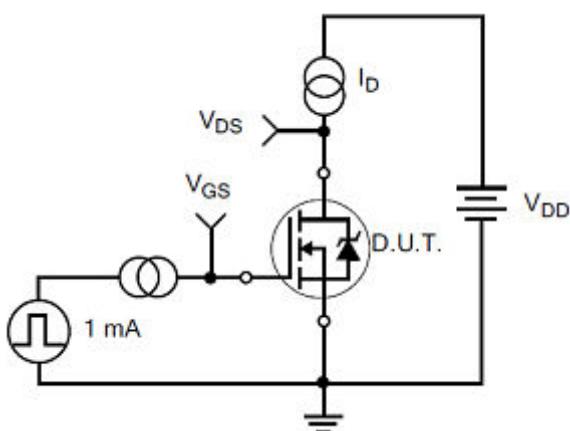


Figure 13 Gate Charge Waveforms

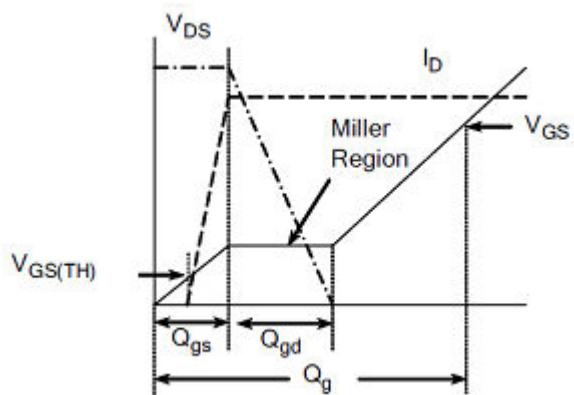


Figure 14 Resistive Switching Test Circuit

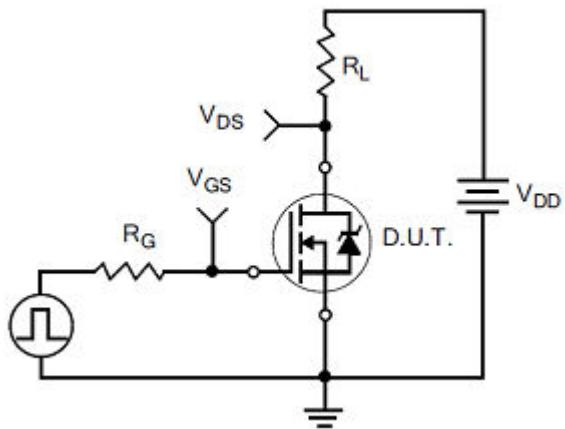


Figure 15 Resistive Switching Waveforms

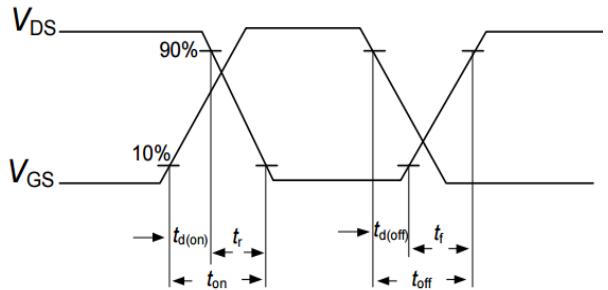




Figure 16 Diode Reverse Recovery Test Circuit

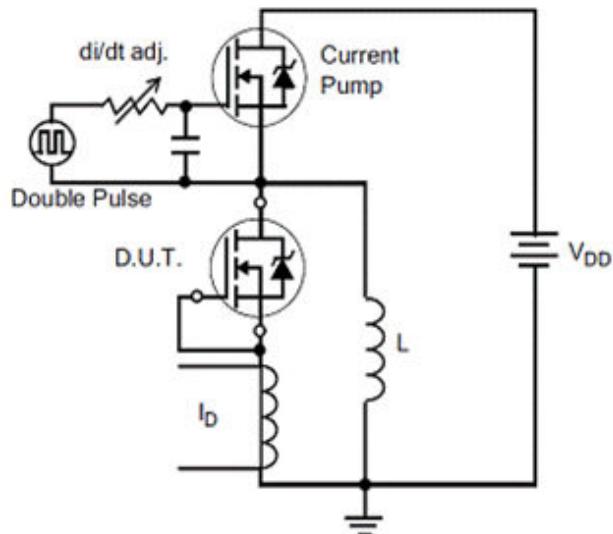


Figure 17 Diode Reverse Recovery Waveform

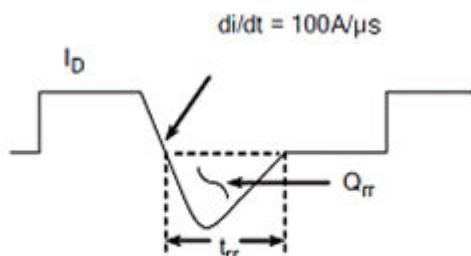


Figure 18 Unclamped Inductive Switching Test Circuit



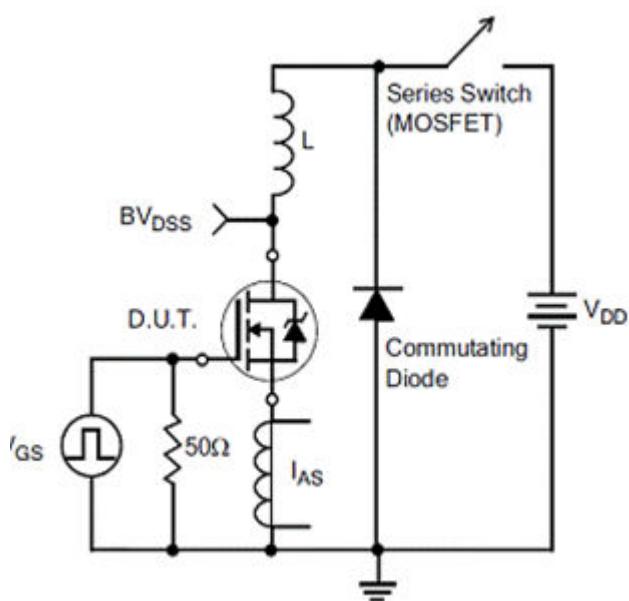


Figure 19 Unclamped Inductive Switching Waveform



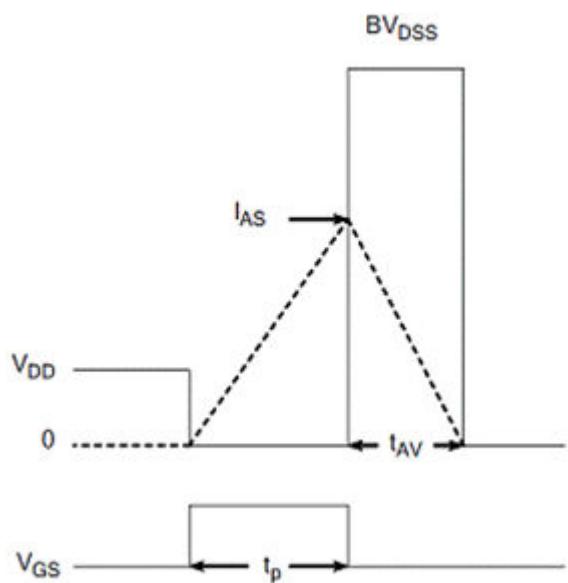


## 7. Package Description

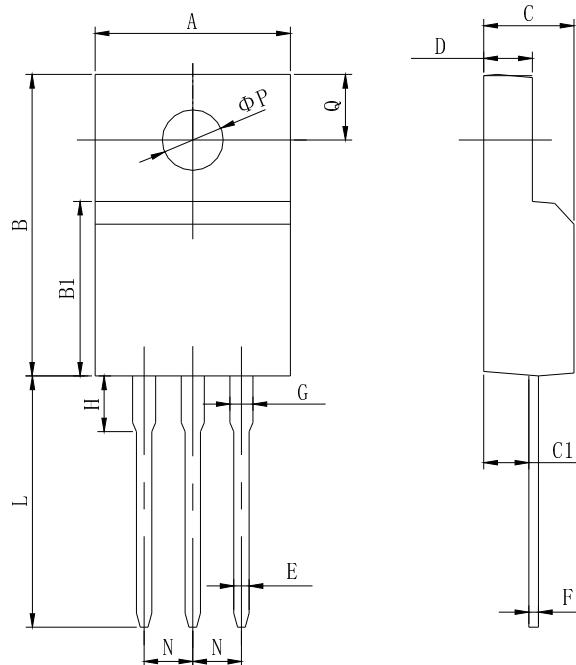


Items	Values(mm)	
	MIN	MAX
A	9.60	10.4
B	15.4	16.2
B1	8.90	9.50
C	4.30	4.90
C1	2.10	3.00
D	2.40	3.00
E	0.60	1.00
F	0.30	0.60
G	1.12	1.42
H	3.40	3.80
H	1.60	2.90
L	12.0	14.0
N	2.34	2.74
Q	3.15	3.55
$\phi P$	2.90	3.30

TO-220F Package

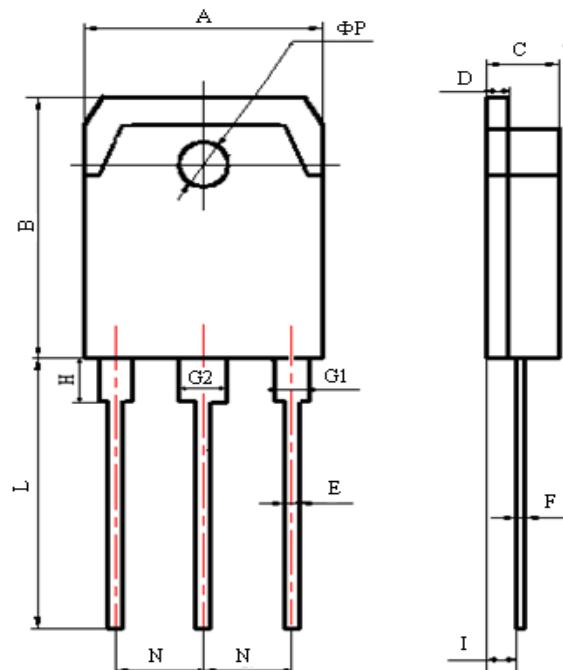

Items	Values(mm)	
	MIN	MAX
A	15.00	16.00
B	19.20	20.60
C	4.60	5.00
D	1.40	1.60
E	0.90	1.10
F	0.50	0.70
G1	2.00	2.20
G2	3.00	3.20
H	3.00	3.70
I	1.20	1.70
	2.70	2.90
L	19.00	21.00
N	5.25	5.65
Φ P	3.10	3.30

TO-3PN Package

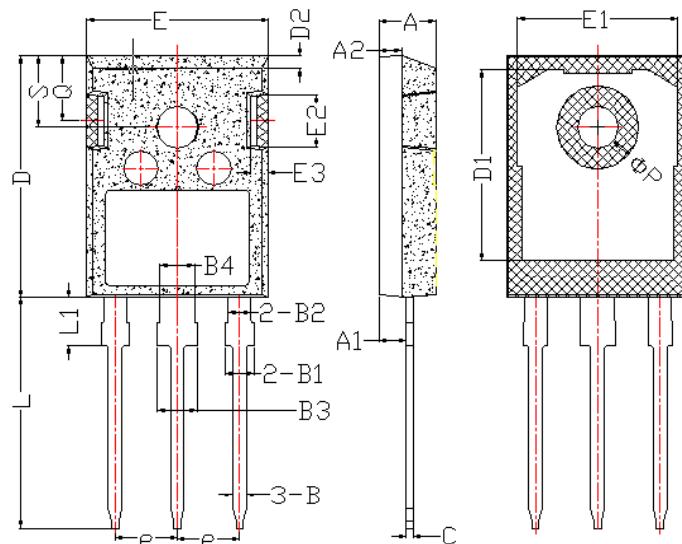

Items	Values(mm)	
	MIN	MAX
A	4.6	5.2
A1	2.2	2.6
B	0.9	1.4
B1	1.75	2.35
B2	1.75	2.15
B3	2.8	3.35
B4	2.8	3.15
C	0.5	0.7
D	20.60	21.30
D1	16	18
E	15.5	16.10
E1	13	14.7
E2	3.80	5.3
E3	0.8	2.60
e	5.2	5.7
L	19	20.5
L1	3.9	4.6
$\Phi P$	3.3	3.70
Q	5.2	6.00
S	5.8	6.6

TO-247 Package



上海捷瑞德半导体  
Jerrett Semiconductor

**JR9N90**  
**Power MOSFET**

**NOTE:**

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shanghai Jerrett reserves the right to make changes in this specification sheet and is subject to change without prior notice.