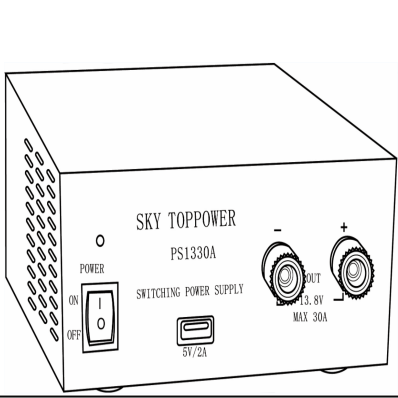
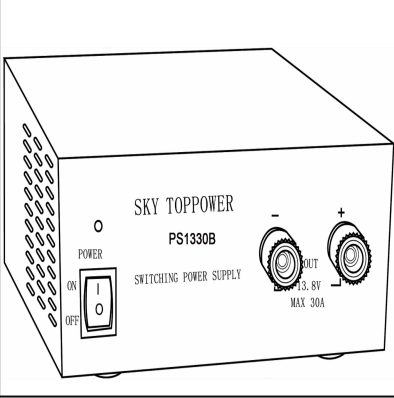


SPECIFICATIONS

ITEM		
Model No	PS1330A	PS1330B
5V/2A USB Interface	YES	NO
Input Voltage	AC110V±10%,60Hz II AC220V±10%,50Hz	
Output Voltage	DC13.8V Fixed	
Output Current Max	30A	
Output Continuous Current	20A	
Output Voltage Regulation	Less than 2%	
Output Ripple Noise	Less than 80mVp-p-rated load	
Output Protection	Short-circuit / Automatic current limit within 30A	
Input Fuse	F6AL250VAC	
Dimensions	150x70x220mm	
Cooling System	Thermally Control Fan	
Weight	1.5kg	

 TOPPOWER

**SWITCHING MODE
DC REGULATED POWER SUPPLY**

PS Series

13.8 Volt 30 Amp Power Supply

INSTRUCTION MANUAL

Shenzhen SKY TOPPOWER Technology Co., Ltd

PART NAMES AND FUNCTIONS

1. Power switch : Turns the unit on and off.
2. Work Indicator Light
3. 5V/2A USB Interface (PS1330A)

Attention:

PS1330B power supply without 5V/2A USB Interface

4. Output terminal:Red positive(+),Black negative(-)

Attention:


OUTPUT: 13.8V, 30A(MAX)

5. Cooling fan.
6. FUSE : If you want to change FUSE F1, please use the screwdriver and pull out the relief cover which in the outlet.

CAUTION

Place the unit in a dry and well ventilated area.

- Never touch the unit while it is working. Even though it is designed for high efficiency the unit will still get hot.
- If a short circuit occurs while outputting, the unit will be protected by a short circuit protection function. Turn off the unit and repair the cause of the short circuit immediately, then turn it back on.
- Do not use the unit for devices that require high current input at the start, such as motorized equipment. Do not use the unit to charge a car battery.

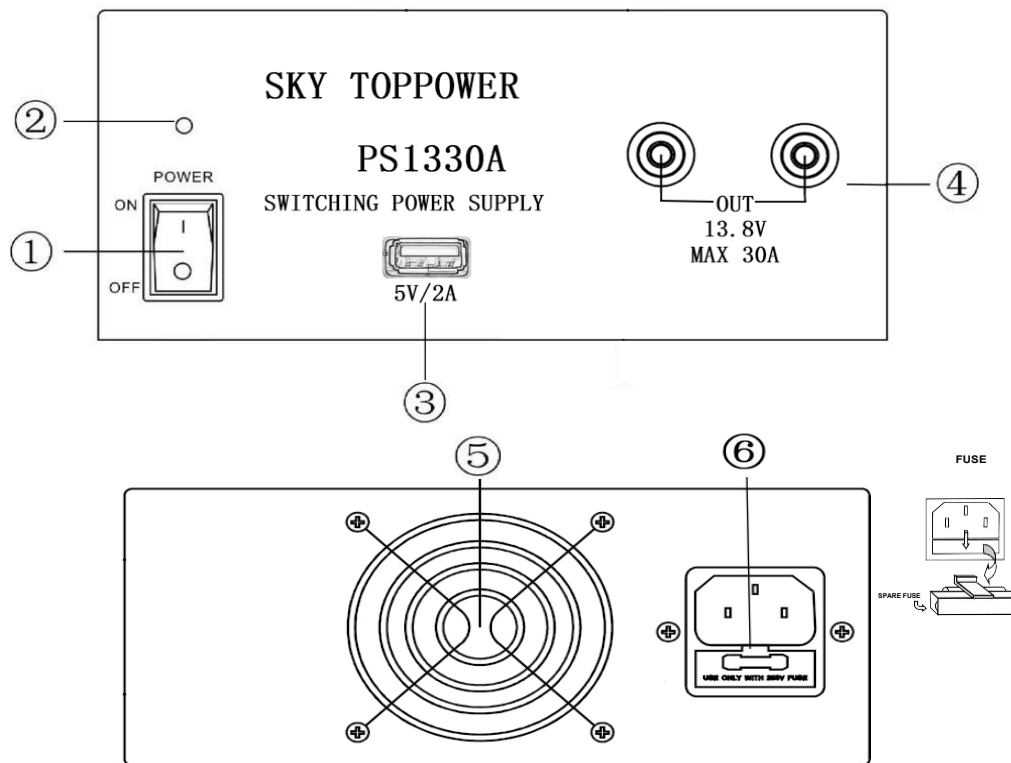

CONTACT US

Tel: + 86-755-23316973

E-mail: support@skytppower.com

Skype: live:skytppower_2

Web: www.skytppower.com

Adress: 3F, Building A2, Baicai Industrial Park, 19 Tianbao Road,Shiyan,Shenzhen