


# Optical Fiber Mirror

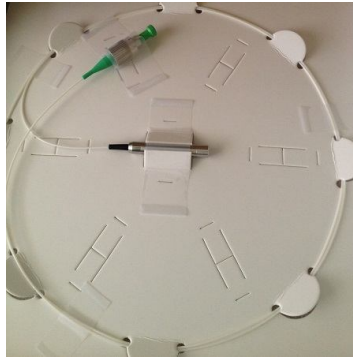

## Specification

Parameter	Unit	Value	
Center Wavelength	nm	780, 850	980, 1030, 1064
Operating Wavelength Range	nm	±30	
Typ. Insertion Loss	dB	0.5	0.7
Max. Insertion Loss	dB	0.9	0.7
Max. PDL	dB	0.1	
Max. Optical Power	mW	300	
Pigtail type		Bare fiber or 0.9mm jacket	
Fiber Type		HI780	HI1060
Package Dimension	mm	5.5x35 or 4.2x25	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	

## Package Dimension:

