


序号	品名	材质
①	0.5mm 盖板芯 (H1.5)	LCP U94V-0 本色
②	0.5mm 盖端子 (H1.5)	铜合金/表面镀锡
③	0.5mm 盖后盖 (H1.5)	LCP U94V-0 黑色
④	0.5mm 盖薄片 (H1.5)	铜合金/表面镀锡

通用线路板 (PCB LAYOUT)

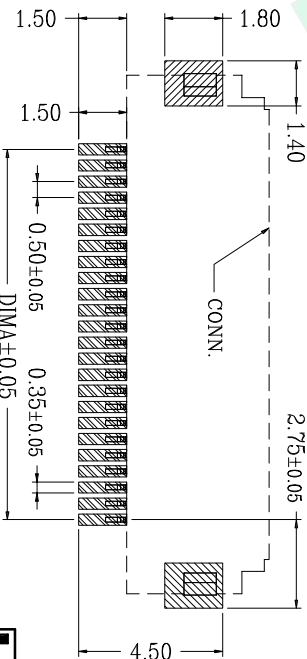

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25°C~85°C。
3. 额定电压: 50V, AC/DC(等效)。
4. 接触电阻: ≤0.03Ω。
5. 绝缘电阻: ≥500MΩ。

C/T	DIMA	DIMB	DIMC	CKT	DIMA	DIMB	DIMC
4	1.50	6.20	2.53	33	16.00	20.70	17.03
5	2.05	6.70	3.03	34	16.50	21.20	17.53
6	2.50	7.20	3.53	35	17.00	21.70	18.03
7	3.00	7.70	4.03	36	17.50	22.20	18.53
8	3.55	8.20	4.53	37	18.00	22.70	19.03
9	4.00	8.70	5.03	38	18.50	23.20	19.53
10	4.50	9.20	5.53	39	19.00	23.70	20.03
11	5.00	9.70	6.03	40	19.50	24.20	20.53
12	5.50	10.20	6.53	41	20.00	24.70	21.03
13	6.00	10.70	7.03	42	20.50	25.20	21.53
14	6.50	11.20	7.53	43	21.00	25.70	22.03
15	7.00	11.70	8.03	44	21.50	26.20	22.53
16	7.50	12.20	8.53	45	22.00	26.70	23.03
17	8.00	12.70	9.03	46	22.50	27.20	23.53
18	8.50	13.20	9.53	47	23.00	27.70	24.03
19	9.00	13.70	10.03	48	23.50	28.20	24.53
20	9.50	14.20	10.53	49	24.00	28.70	25.03
21	10.00	14.70	11.03	50	24.50	29.20	25.53
22	10.50	15.20	11.53	51	25.00	29.70	26.03
23	11.00	15.70	12.03	52	25.50	30.20	26.53
24	11.50	16.20	12.53	53	26.00	30.70	27.03
25	12.00	16.70	13.03	54	26.50	31.20	27.53
26	12.50	17.20	13.53	55	27.00	31.70	28.03
27	13.00	17.70	14.03	56	27.50	32.20	28.53
28	13.50	18.20	14.53	57	28.00	32.70	29.03
29	14.00	18.70	15.03	58	28.50	33.20	29.53
30	14.50	19.20	15.53	59	29.00	33.70	30.03
31	15.00	19.70	16.03	60	29.50	34.20	30.53
32	15.50	20.20	16.53				

工程变更通知单 ECN (DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.	GENERAL TOLERANCE (UNLESS OTHERWISE NOTED)	角度 Angle	DRAW	绘图	TITLE:	SCALE	UNIT	DATE:
	P0					±2°	30~	DESIGN	设计	0.5mm 翻盖下接口. 5	1:1	mm	2016-6-18
						±0.5	10~30	CHECK	校阅	HK-05WSHA-NP-1.5-X			
						±0.3	~10						
						±0.15							

HUIKE 东莞市辉科电子有限公司
DongGuan HuiKe Electronics Co., Ltd.