

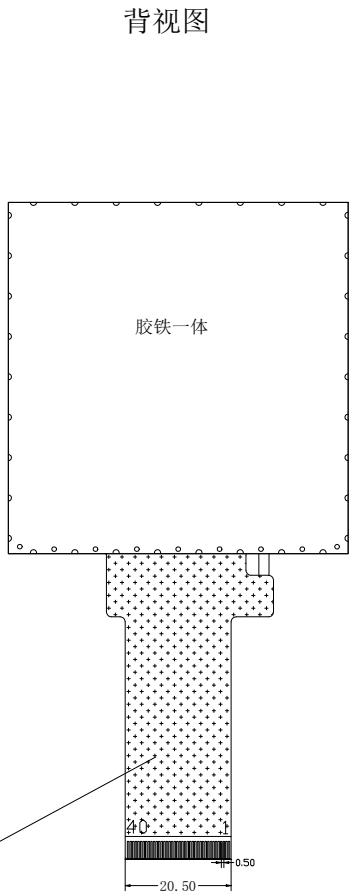



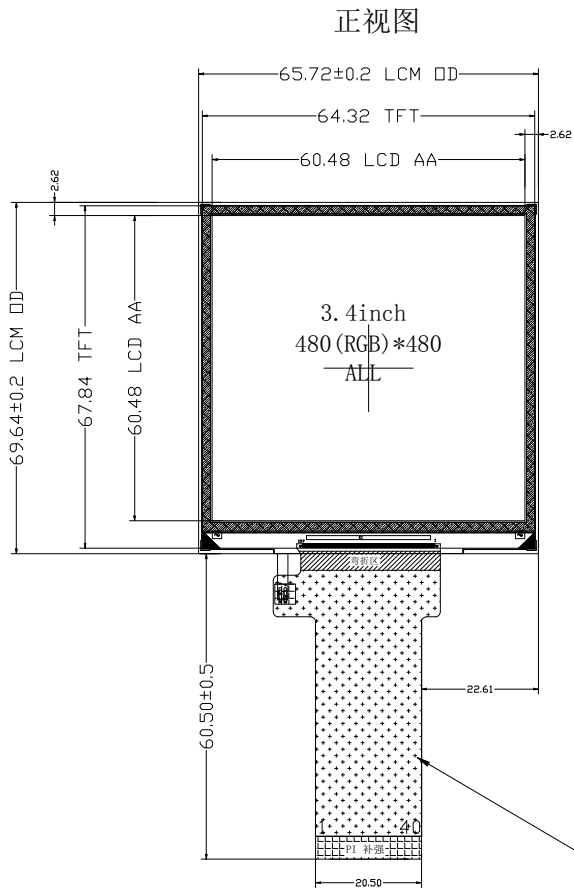

双面EMI
有胶电解



BLU CIRCUIT DIAGRAM
VDD=13.5-16.5V IDD=40mA

PIN: SYMBLE

1	LEDA
2	LEDK
3	LEDK
4	GND
5	VCI (3.3V)
6	RESET
7	NC
8	NC
9	SDA
10	SCL
11	CS
12	PCLK
13	DE
14	VSYN
15	HSYN
16~33	DB0~DB17
34	GND
35	TP_INT/NC
36	TP_SDA/NC
37	TP_SCL/NC
38	TP_RESET/NC
39	TP_VCI/NC
40	GND

- Unit:mm.
- Modification rev.number.
- All radii without dimension R0.3mm.
- All draft angles to be 1.5°
- Unspecified Tolerances is :±0.20mm.
- Driver IC: ST7701S
- Color : White
- Operating Temperature : -20°-- +70°C
- Storage Temperature : -30° -- +80° C
- Requirements on Environmental Protection: ROHS HSF

标示	日期	更改内容	签署