


7 秒快拆 | 自动锁定
Quick fit | Autolock

P


atented product
专利产品

快拆 | 抗振 | 防水 | 耐久 | 自锁定
Quick Fit | Anti-Vibration | WaterProof
Durability | Autolocking

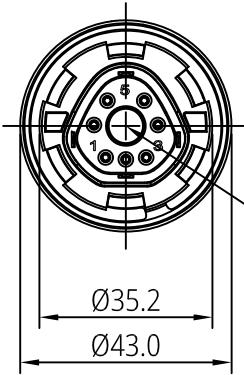

REC Screw torque
19.6N (2.0kgf) max.



PAW09-201主轴
PAW09-202滑动轴
导电Conductive




建议匹配管径
REC match tube
外径 OD 36.5mm
内径 ID 34.0mm

可选颜色识别标志
Optional Color control
(红色或白色RD or WH)

3D View

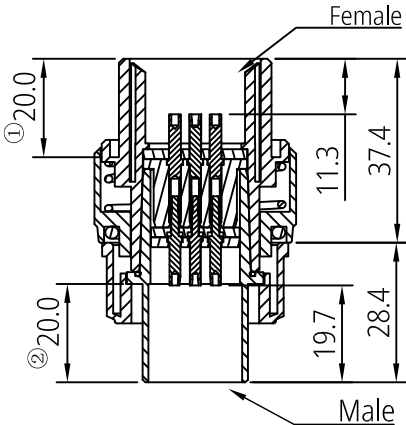

Mating View





Recommended
16 or 18AWG

depth of penetration
①②插入深度
对配机身和机臂端




Notes:

1. Material Specification
- 1-1.Housing: High Temperature Thermoplastic. UL94 V-0 & HB, Black.
- 1-2.Contact: High Conductivity Copper Alloy.
- 1-3. Screw & Nut: Copper Alloy.
2. Plating Specification: Contact: Gold plating overall.
3. Electrical performance
- 3-1. Voltage Rating: 250V DC max.
- 3-2. Current Rating: 15A/Per Pin.
- 3-3. LLCR: 1.2mΩ max. at working height.
- 3-4. Dielectric Withstanding Voltage:
1500v DC rms/Power Pin.
- 3-5. Insulation Resistance: 5000 MΩ min/Power Pin.
4. Mechanical Performance:
- 4-1. Insertion force: 68.6N (7.0kgf) (max).
- 4-2. Withdrawal force: 19.6N~63.7N (2.0~6.5 kgf).
- 4-3. Durability life: 5,000 cycles.
5. Waterproof grade: IPX5 in the mate connectors module state.
6. Operating Temperature Range: -40~125°c(without loss function).
7. All parts RoHS and Reach compliant.
8. See SPS-PAW-01 for assembly sequence with device.


THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. PAW0910C0002		Prolanv [®]				
	.X± 0.30	X°± 3°							
	.XX± 0.20	.X°± 2°	APPROVED BY Mike		TITLE AW40 Female. Wire-Harness Type. arm connector module				
	.XXX± 0.05	.XX°± 1°							
	CUSTOMER DRAWING		CHECKED BY Henry		DWG NO. PAW09-20				
	SIZE	UNITS	DRAWN BY Poplar				SHEET	SCALE	REV
	A4	mm[only]					1 / 2	1:1	A0




10 Pcs/Tray

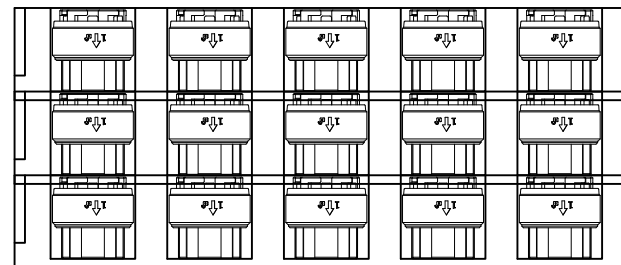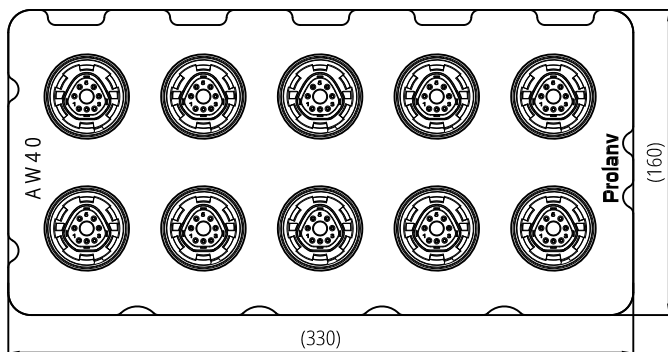

Total: 2x3 Layers

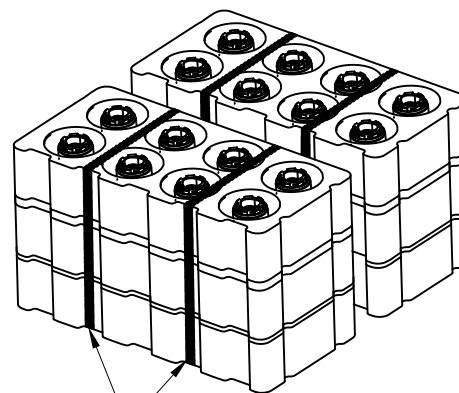


PE Film

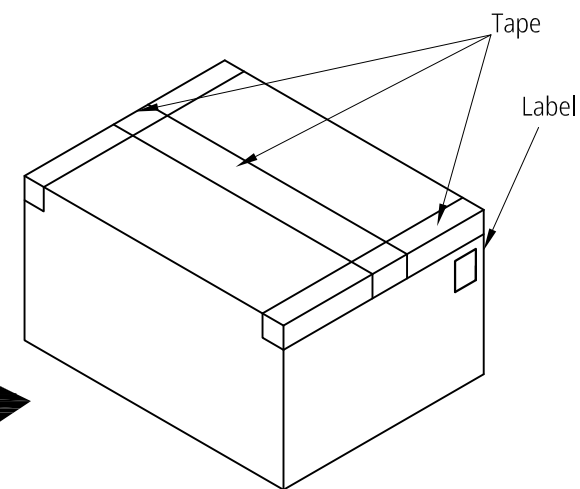

Notes:

1. Q'ty: 10 Pcs/Tray, 2x3 Layers= 60 Pcs/Carton.
2. Tray Pallet size: 330*160mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	Prolanv®			
	$X \pm 0.30$	$X^{\circ} \pm 3^{\circ}$	PAW0910C0002				
	$XX \pm 0.20$	$X^{\circ} \pm 2^{\circ}$	APPROVED BY	TITLE			
	$XXX \pm 0.05$	$XX^{\circ} \pm 1^{\circ}$	Mike	AW40 Female.Wire-Harness Type. arm connector module Packaging			
	CUSTOMER DRAWING		CHECKED BY	DWG NO.			
			Henry	P-PAW09-20			
	SIZE	UNITS	DRAWN BY			SHEET	SCALE
A4	mm[only]	Poplar	2 / 2			N/A	A0