
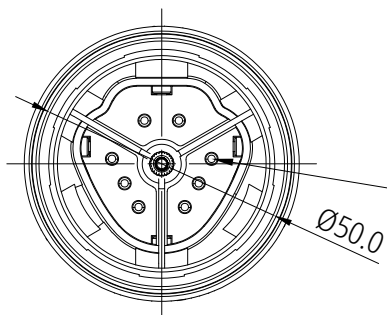
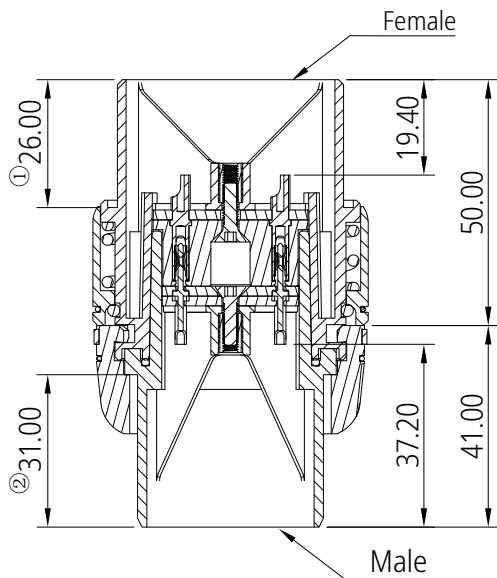

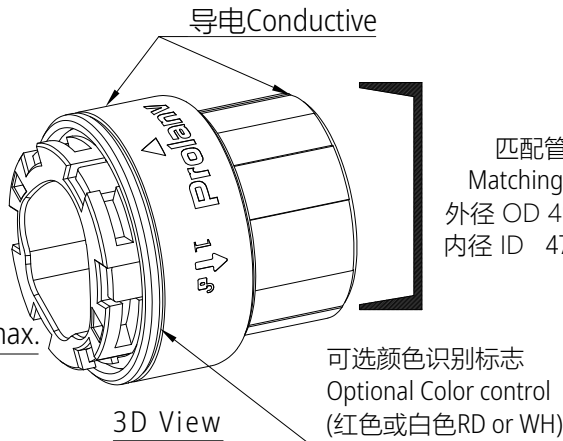


7 秒快拆 | 自动锁定
Quick fit | Autolock

Patented product
专利产品
快拆 | 抗振 | 防水 | 耐久 | 自锁定
Quick Fit | Anti-Vibration | Waterproof
Durability | Autolocking

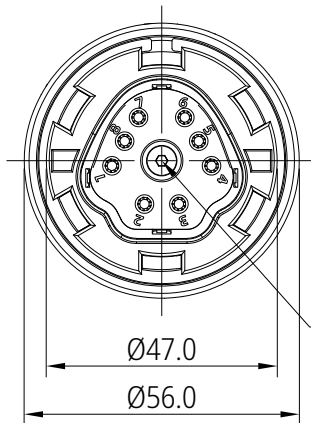



Mating View

depth of penetration
①②插入深度
对配机身和机臂端


Notes:

- Material Specification
 - 1-1. Housing: High Temperature Thermoplastic. UL94 V-0 & HB, Black.
 - 1-2. Contact: High Conductivity Copper Alloy.
 - 1-3. Screw & Nut: Copper Alloy.
 - 1-4. Spring: Steel Alloy.
 - 1-5. O-ring: Silica gel.
- Plating Specification: Contact: Gold plating overall.
- Electrical performance
 - 3-1. Voltage Rating: 250V DC max.
 - 3-2. Current Rating: 35A/Per Pin.
 - 3-3. LLCr: 1.2mΩ max. at working height.
 - 3-4. Dielectric Withstanding Voltage: 1500v DC rms/Power Pin.
 - 3-5. Insulation Resistance: 5000 MΩ min/Power Pin.
- Mechanical Performance:
 - 4-1. Insertion force: 78.4N (8.0kgf) (max).
 - 4-2. Withdrawal force: 19.6N~63.7N (2.0~6.5 kgf).
 - 4-3. Durability life: 5,000 cycles.
- Waterproof grade: IPX5 in the mate connectors module state.
- Operating Temperature Range: -40~125°C.
- All parts RoHS and Reach compliant.
- See SPS-PAW-01 for assembly sequence with device.



THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	Prolanv®			
	X± 0.30	X°± 3°	PAW1110C0001				
	XX± 0.20	XX°± 2°	APPROVED BY	TITLE AW40 Female. Wire-Harness Type. arm connector module			
	XXX± 0.10	XXX°± 1°	Henry	DWG NO. PAW11-10			
	CUSTOMER DRAWING		CHECKED BY				
	SIZE	UNITS	Poplar				
A4			DRAWN BY	SHEET 1 / 2			
mm[only]			Kaylee	SCALE 1:1			
				REV A0			





8 Pcs/Tray

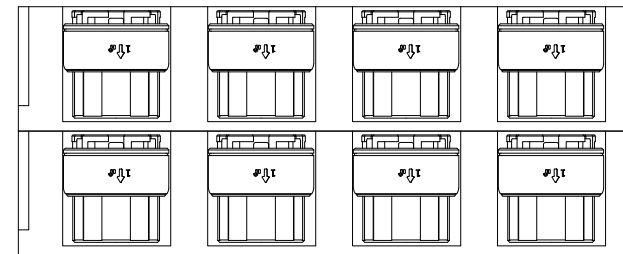

Total: 2x2 Layers

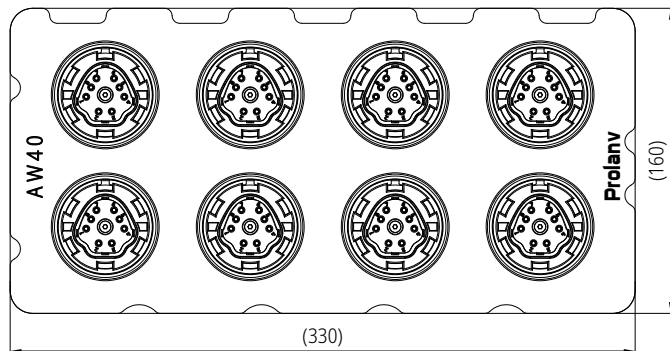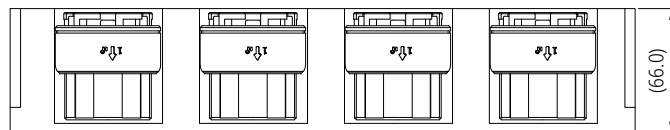


PE Film

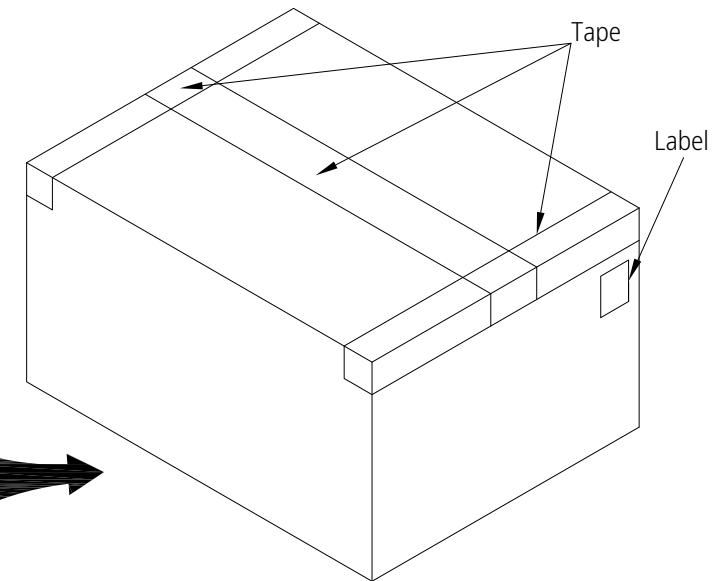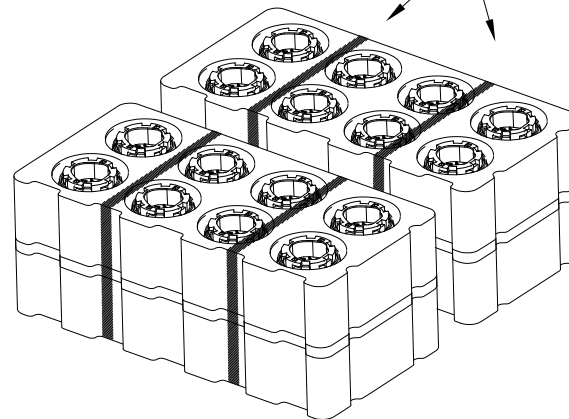

Notes:

1. Q'ty:8 Pcs/Tray, 2x2 Layers=32 Pcs/Carton.
2. Tray Pallet size: 330*160mm.
3. Carton size: 350*350*155mm.

THIS DRAWING AND SPECIFICATION ARE THE PROPERTY OF Prolanv AND SHALL NOT BE COPIED OR USED WITHOUT Prolanv PERMISSION	GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. PAW1110C0001		Prolanv®			
	X± 0.30	X°± 3°	APPROVED BY Henry					TITLE AW40 Female.Wire-Harness Type. arm connector module Packaging
	XX± 0.20	XX°± 2°						
	XXX± 0.05	XXX°± 1°						
	CUSTOMER DRAWING		CHECKED BY Poplar		DWG NO. P-PAW11-10			
	SIZE		DRAWN BY					
	UNITS							
A4	mm[only]	Kaylee		SHEET 2 / 2			SCALE N/A	REV A0