



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

Item 项次	P/N 料号	Dim(L/W/H) 尺寸(mm)	HGT 合高(mm)	Voltage 电压	Current 电流	PW Pair 电源组	Signal Pin 信号	Style 封装	Press fit 适用压接	Page 页码	
	【迷你刀片大电流系列 Mini blade Power Conn】										
1	PDC0710B0001	16.3*21.7*6.0	22.0	100V	35A	2Pairs	4pins	Wire-harness 焊线式	NA	1	
2	PDC0810B0001	14.7*20.1*6.0						R/A DIP折弯插板式		1	
3	PDC5310C0001	35.4*7.5*21.9	28.9	250V	60A	2Pairs	4pins	wire-harness 焊线式	NA	1	
4	PDC5410C0001	35.4*8.8*17.5						Straight DIP直立插板式		1	
5	PDC1510B0001	35.0*9.3*8.0	10.1	50V	120A	12Pins	Flexible setting 自由设定	Straight DIP直立插板式	NA	3	
6	PDC1610B0011	39.4*12.2*6.9				12Pairs				3	
7	PDC1530B0001	50.3*9.3*8.0	10.1	50V	120A	12Pins		Straight DIP直立插板式	NA	3	
8	PDC1620B0011	50.3*12.2*6.9				12Pairs				3	
	【微型板对板大电流系列 Mini B-to-B Power conn】										
9	PDC1310B0001	25.4*5.2*7.1	10.0	60V	60A	2Pairs	4pins	Straight DIP直立插板式	NA	2	
10	PDC1210B0001	25.4*5.2*7.4								2	
11	PDC1010B0005	20.2*5.0*6.5	9.1	50V	40A	2Pairs	NA	Straight DIP直立插板式	NA	2	
12	PDC1110B0005	21.0*5.6*7.6								2	
	【超迷你型卡式大电流 Ultra Mini Edge Card Slot										
13	PBC0210B0001	24.5*7.0*9.0	NA	50V	40A	2Pairs	10pins	Straight SMT直立贴片式	NA	4	
	【EN60A刀片式大电流系列 EN60A blade Hi-Current Power conn】										
14	PDC0110F0002	47.1*29.5*10.0	22.0/29.4	250V	140A	4Pairs	6Pins	R/A DIP折弯插板式	NA	4	
15	PDC0120F0001	47.1*13.9*21.9						Straight DIP直立插板式	Yes	4	
16	PDC0210F0001	47.1*18.0*14.4									5
17	PDC0110F0003	47.1*29.5*10.0						R/A DIP折弯插板式	NA	5	
18	PDC0120F0002	47.1*13.9*21.9						Straight DIP直立插板式	Yes	5	
19	PDC0120F0003	47.1*13.9*21.9									5
20	PDC1710F0002	66.5*29.5*10.0	22.0/29.4	250V	195A	6Pairs	12Pins	R/A DIP折弯插板式	NA	6	
21	PDC1720F0001	66.5*13.9*21.9						Straight DIP直立插板式	Yes	6	
22	PDC1810F0002	66.5*18.0*14.4									6
23	PDC1710F0003	66.5*29.5*10.0						R/A DIP折弯插板式	NA	6	
24	PDC1720F0002	66.5*13.9*21.9						Straight DIP直立插板式	Yes	7	
25	PDC1720F0003	66.5*13.9*21.9									7
26	PDC1910F0002	73.1*29.5*10.0	22.0/29.4	250V	240A	8Pairs	6Pins	R/A DIP折弯插板式	NA	7	
27	PDC1920F0001	73.1*13.9*21.9						Straight DIP直立插板式	Yes	7	
28	PDC2010F0001	73.1*18.0*14.4								8	
29	PDC1920F0002	73.1*13.9*21.9								8	
30	PDC1920F0003	73.1*13.9*21.9								8	

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

Item 项次	P/N 料号	Dim(L/W/H) 尺寸(mm)	HGT 合高(mm)	Voltage 电压	Current 电流	PW Pair 电源组	Signal Pin 信号	Style 封装	Press fit 适用压接	Page 页码
	【EN60A刀片式大电流系列 EN60A blade Hi-Current Power conn】									
31	PDC2210F0001	88.5*18.0*14.4	22.0/29.4	250V	300A	10Pairs	12Pins	Straight DIP直立插板式	Yes	8
32	PDC2110F0001	88.5*13.9*21.9								9
33	PDC2120F0002	88.5*13.9*21.9								9
34	PDC2120F0003	88.5*13.9*21.9								9
35	PDC2110F0003	88.5*29.2*10.0	29.4	250V	195A	7Pairs	6Pins	R/A DIP折弯插板式	NA	9
36	PDC2510F0002	66.5*29.5*10.0						R/A DIP折弯插板式	NA	10
37	PDC2510F0003	66.5*29.5*10.0								Straight DIP直立插板式
38	PDC2610F0001	66.5*18.0*14.4								
39	PDC2810F0001	77.5*18.0*14.4	22.0/29.4	250V	240A	8Pairs	12Pins	Straight DIP直立插板式	Yes	10
40	PDC2710F0001	77.5*13.9*21.9								11
41	PDC2710F0003	77.5*29.2*10.0						R/A DIP折弯插板式	NA	11
42	PDC2720F0002	77.5*13.9*21.9								Straight DIP直立插板式
43	PDC2720F0003	77.5*13.9*21.9								
44	PDC2910F0001	83.5*13.9*21.9	22.0/29.4	250V	360A	12Pairs	Flexible setting 自由设定	Straight DIP直立插板式	Yes	12
45	PDC3010F0001	83.5*18.0*14.4								12
46	PDC2910F0003	83.5*29.2*10.0						R/A DIP折弯插板式	NA	12
47	PDC2920F0002	83.5*13.9*21.9								Straight DIP直立插板式
48	PDC2920F0003	83.5*13.9*21.9								
	【EX150刀片式大电流系列 EX150 blade Hi-Current Power Conn】									
49	PDC3320F0001	70.3*20.0*20.5	30.0	600V	300A	4Pairs	24Pins	Straight DIP直立插板式	Yes	13
50	PDC3410F0001	76.9*27.0*21.0								13
51	PDC3330F0001	70.3*20.0*20.5	30.0	600V	300A	4Pairs	12Pins	Straight DIP直立插板式	Yes	13
52	PDC3410F0002	76.9*27.0*21.0								14
53	PDC3720F0001	88.1*20.0*20.5	30.0	600V	450A	6Pairs	24Pins	Straight DIP直立插板式	Yes	14
54	PDC3810F0001	94.7*27.0*21.0								14
55	PDC3730F0001	88.1*20.0*20.5	30.0	600V	450A	6Pairs	12Pins	Straight DIP直立插板式	Yes	14
56	PDC3810F0002	94.7*27.0*21.0								15
	【AT80针式大电流系列 AT80 Needle Hi-Current Power Conn】									
57	PAT0110BT001	37.0*23.2*14.0	35.7	200V	80A	2Pairs		Wire-harness 焊线式	NA	15
58	PAT0210BT001	34.1*25.6*17.5								15
59	PAT0220BT001	34.1*37.5*17.5								15
	【AW40机臂电连接器模组 Arm quick fit Connector Module】									
60	PAW0710C0002	ø46.6/ø56.0/L57.0	34.0	250V	140A	8Pairs		Wire-harness 焊线式	NA	16
61	PAW0810C0002	ø37.8/ø53.5/L60.2								16
62	PAW0910C0002	ø33.6/ø43.0/L43.4	25.8	250V	105A	7Pairs		Wire-harness 焊线式	NA	16
63	PAW1010C0002	ø25.6/ø40.0/L43.4								16



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

Item 项次	P/N 料号	Dim(L/W/H) 尺寸 (mm)	HGT 合高 (mm)	Voltage 电压	Current 电流	PW Pair 电源组	Signal Pin 信号	Style 封装	Press fit 适用压接	Page 页码
	【AW40机臂电连接器模组 Arm quick fit Connector Module 】									
64	PAW1110C0001	∅46.6/∅56.0/L57.0	34.0	250V	140A	8Pairs		Wire-harness 焊线式	NA	17
65	PAW1210C0001	∅37.8/∅53.5/L60.2						Wire-harness 焊线式		17
	【Other Type 】									
	Busbar Style 滑轨式/汇流条									
66	PBC03-111	L33.5/H17.5/W14.8	21.75	150V	75A	NA		DIP	NA	17
67	PBC04-111	L33.5/H12.5/W9.5								17



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

迷你大电流公头2电源4信号.焊线式 | Mini Hi-Current Power Male. 2P4S. Wire-Harness type


PDC0710B0001



Compatible P/N:

PDC0810B0001


电压Voltage rating	100VDC/max
电流Current rating	35A/Per power Pin.
接触电阻Contact resistance	1.0mΩ max.
耐久Durability life	2,000 cycles .
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Motor

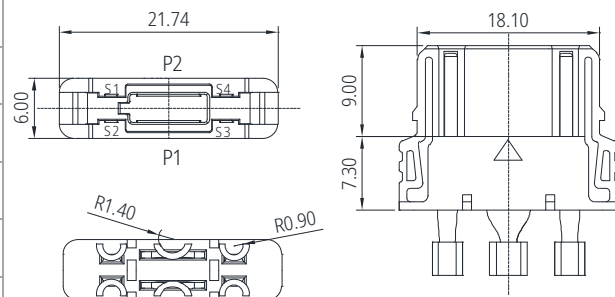

Patented product
专利产品

迷你大电流母座2电源4信号.折弯插板式 | Mini Hi-Current Power Female. 2P4S. R/A type


PDC0810B0001



Compatible P/N:

PDC0710B0001


电压Voltage rating	100VDC/max
电流Current rating	35A/Per power Pin.
接触电阻Contact resistance	1.0mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Motor

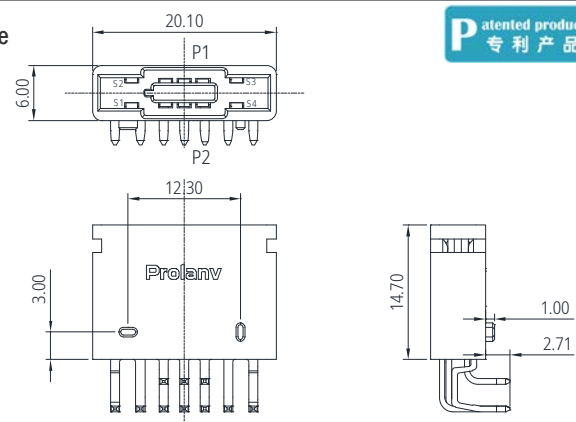

Patented product
专利产品

大电流公头2电源4信号.直立插板式 | Hi-Current Power Male. 2P4S. Straight type


PDC5310C0001



Compatible P/N:

PDC5410C0001

电压Voltage rating	250VDC/max
电流Current rating	60A/Per power Pin.
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Motor



Optional | Not detrimental Spark & Pre-water proof spec.

可选 | 无害打火应用和预置防水规格

大电流母座2电源4信号.直立插板式 | Hi-Current Power Female. 2P4S. Straight type


PDC5410C0001



Compatible P/N:

PDC5310C0001

电压Voltage rating	250VDC/max
电流Current rating	60A/Per power Pin.
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Motor

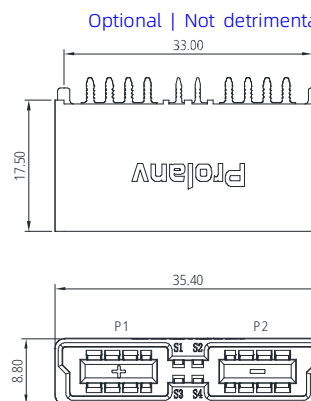

Optional | Not detrimental Spark & Pre-water proof spec.


可选 | 无害打火应用和预置防水规格



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

迷你大电流公座2电源4信号50A.直立插板式 | Mini Hi-Current Power Male. 2P4S. Straight type


PDC1310B0001



Compatible P/N:

PDC1210B0001

电压Voltage rating	60VDC/max
电流Current rating	50A /Per Power Pair
接触电阻Contact resistance	0.5mΩ max (initial).
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域Application Field	Drone/Robot/Motor

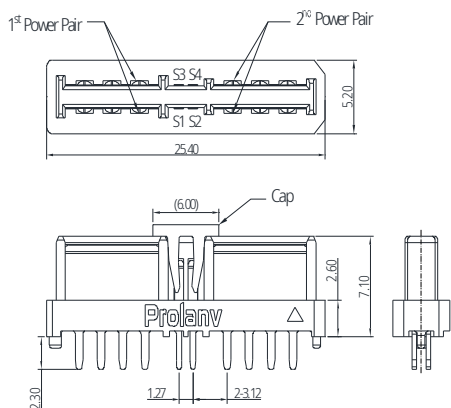

迷你大电流母座2电源4信号50A.直立插板式 | Mini Hi-Current Power Female. 2P4S. Straight type


PDC1210B0001



Compatible P/N:

PDC1310B0001

电压Voltage rating	60VDC/max
电流Current rating	50A /Per Power Pair
接触电阻Contact resistance	0.5mΩ max (initial).
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域Application Field	Drone/Robot/Motor

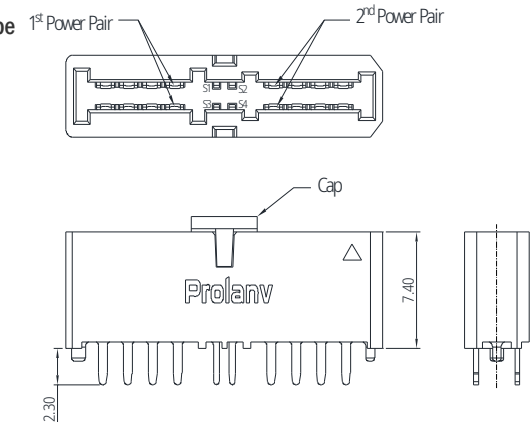

迷你大电流母座2电源 40A.直立插板式 | Mini Hi-Current Power Female. 2PW. Straight type


PDC1010B0005



Compatible P/N:

PDC1110B0005

电压Voltage rating	50VDC/max
电流Current rating	40A /Per Power Pin
接触电阻Contact resistance	0.5mΩ max. Initial
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-35°c~105°c.
应用领域Application Field	Drone/Robot/Motor

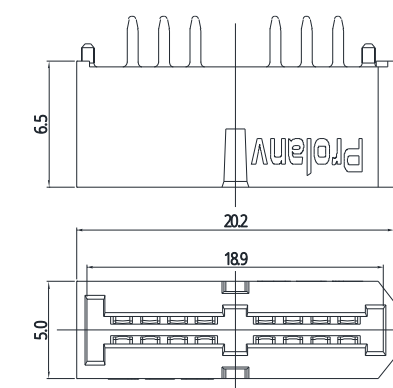

Patented product
专利产品

迷你大电流公座2电源 40A.直立插板式 | Mini Hi-Current Power Male. 2PW. Straight type


PDC1110B0005



Compatible P/N:

PDC1010B0005

电压Voltage rating	50VDC/max
电流Current rating	40A /Per Power Pin
接触电阻Contact resistance	1.0mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-35°c~105°c.
应用领域Application Field	Drone/Robot/Motor

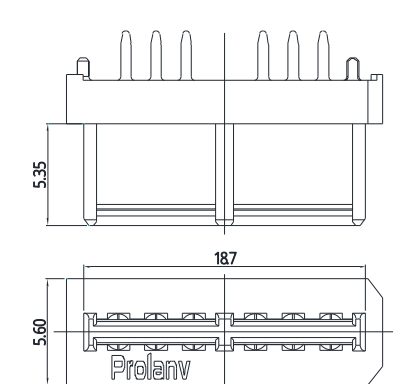

Patented product
专利产品

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

微型刀片大电流公座12PW.直立插板式 | Mini blade Power Male. 12PW. Straight type



PDC1510B0001



Compatible P/N:

PDC1610B0011

电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot

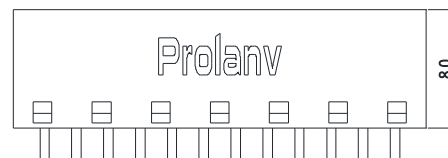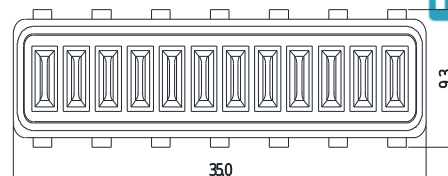

Patented product
专利产品

微型刀片大电流母座12PW.直立插板式 | Mini blade Power Female. 12PW. Straight type



PDC1610B0011



Compatible P/N:

PDC1510B0001

电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot

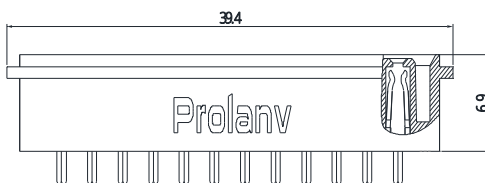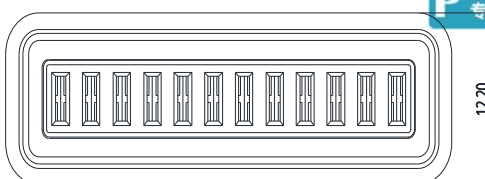

Patented product
专利产品

微型刀片大电流公座12PW.有耳直立插板式 | Mini blade Power Male. 12PW, Straight type



PDC1530B0001



Compatible P/N:

PDC1620B0011

电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot

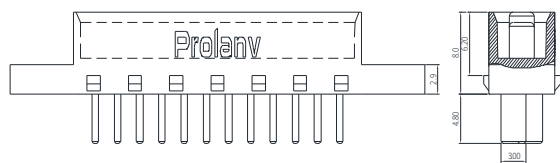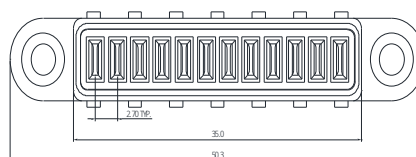

Patented product
专利产品

微型刀片大电流母座12PW.有耳直立插板式 | Mini blade Power Female. 12PW. Straight type



PDC1620B0011



Compatible P/N:

PDC1530B0001

电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot

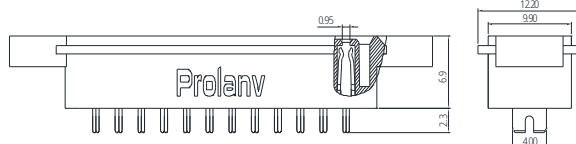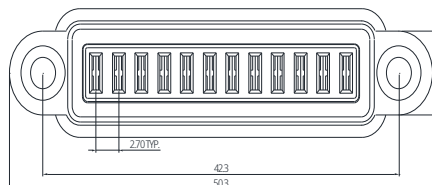

Patented product
专利产品

Units: [mm]



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


超迷你型卡式大电流2组电源10信号.直立贴片式 | Ultra Mini Edge Card Slot.

PBC0210B0001




Compatible P/N:
Module Card or PBC02*

电压Voltage rating	50VDC/max
电流Current rating	40A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2000 cycles min.
工作温度Temperature range	-35°C~120°C.
应用领域 Application Field	IE Device

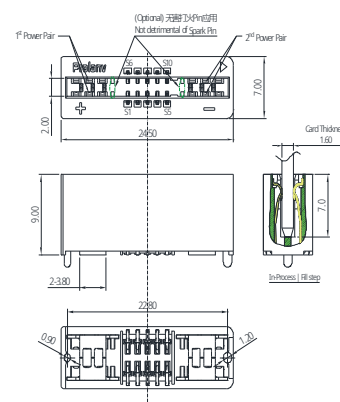

Patented product
专利产品

首页
Home

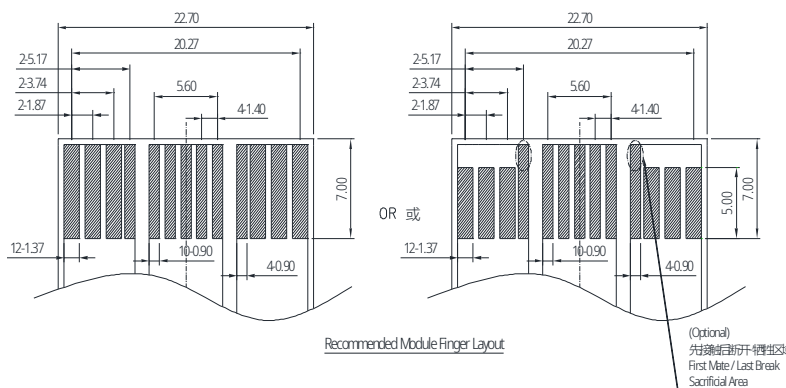


EN60A刀片大电流公座4组电源6信号.折弯式 | EN60A Power Male. 4PW+6S. R/A type

PDC0110F0002



Compatible P/N:
PDC0210F0001


电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

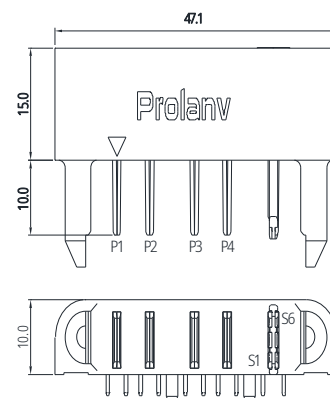

Patented product
专利产品


EN60A刀片大电流公座4组电源6信号.直插式 | EN60A Power Male. 4PW+6S. Straight type

PDC0120F0001



Compatible P/N:
PDC0210F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

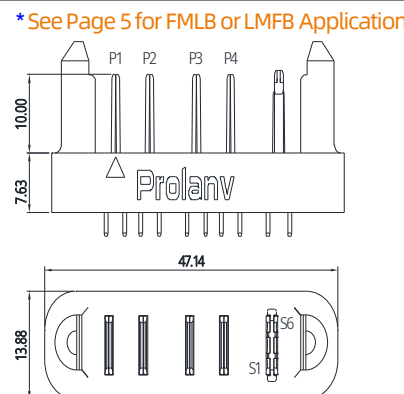


Patented product
专利产品

* See Page 5 for FMLB or LMFB Application

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

EN60A刀片大电流母座4组电源6信号.直插式 | EN60A Power Female.4PW+6S. Straight type



PDC0210F0001



Compatible P/N:

PDC01 1/2 0F000 2-3/1-2-3


电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other



Patented product
专利产品

EN60A刀片大电流公座6组电源6信号.折弯式 | EN60A Power Male.6PW+6S. R/A type



PDC0110F0003



Compatible P/N:

PDC0210F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

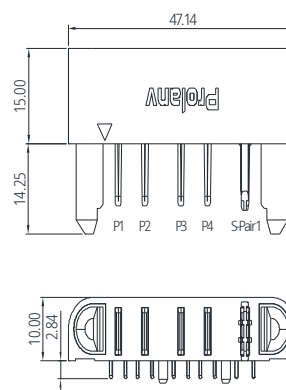

Patented product
专利产品

EN60A刀片大电流公座6组电源6信号.直插式 | EN60A Power Male.6PW+6S. Straight type



PDC0120F0002



Compatible P/N:

PDC0210F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

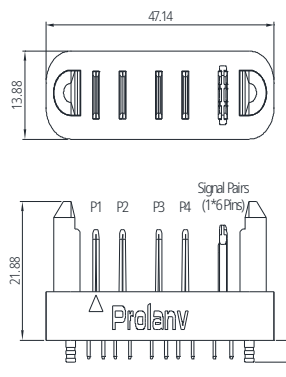

Patented product
专利产品

EN60A刀片大电流公座6组电源6信号.直插式 | EN60A Power Male.6PW+6S. Straight type



PDC0120F0003



Compatible P/N:

PDC0210F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

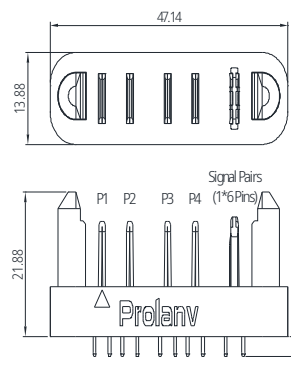

Patented product
专利产品

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


EN60A刀片大电流公座6组电源12信号.折弯式 | EN60A Power Male. 6PW+12S. R/A type

PDC1710F0002



Compatible P/N:
PDC1810F0002

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

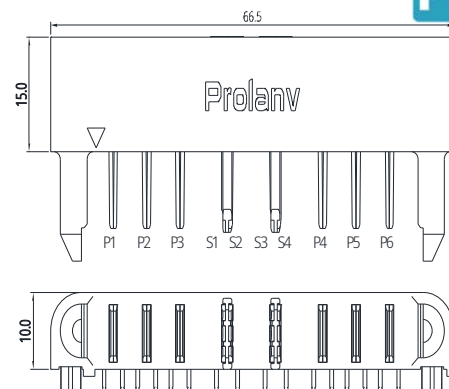


Patented product
专利产品

首页
Home


EN60A刀片大电流公座6组电源12信号.直插式 | EN60A Power Male. 6PW+12S. Straight type

PDC1720F0001



Compatible P/N:
PDC1810F0002

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

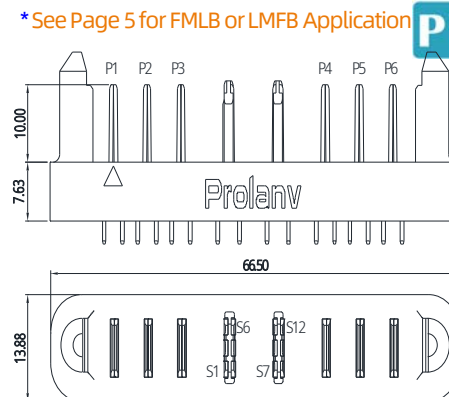

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品


EN60A刀片大电流母座6组电源12信号.直插式 | EN60A Power Female. 6PW+12S. Straight type

PDC1810F0002



Compatible P/N:
PDC171/20F000 2-3/1-2-3

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

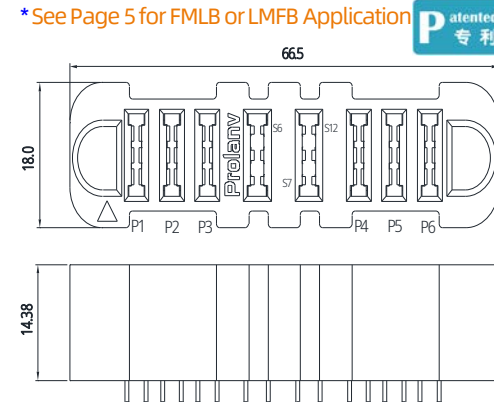


* See Page 5 for FMLB or LMFB Application

Patented product
专利产品


EN60A刀片大电流公座6组电源12信号.折弯式 | EN60A Power Male. 8PW+6S. R/A type

PDC1710F0003



Compatible P/N:
PDC1810F0002

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

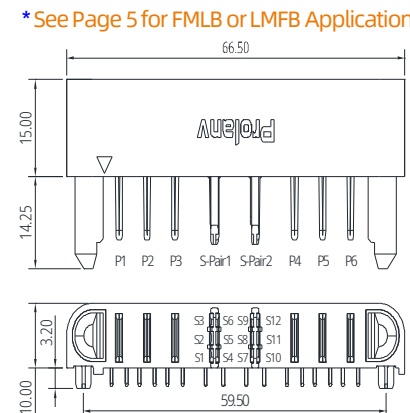

* See Page 5 for FMLB or LMFB Application


Patented product
专利产品

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

EN60A刀片大电流公座6组电源12信号.直插式 | EN60A Power Male. 6PW+12S. Straight type

PDC1720F0002




Compatible P/N:
PDC1810F0002

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other


* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

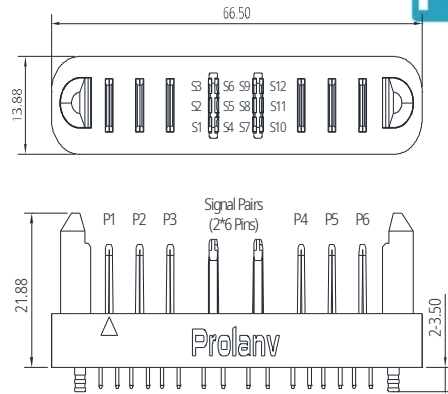

EN60A刀片大电流公座6组电源12信号.直插式 | EN60A Power Male. 6PW+12S. Straight type

PDC1720F0003




Compatible P/N:
PDC1810F0002

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other


* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

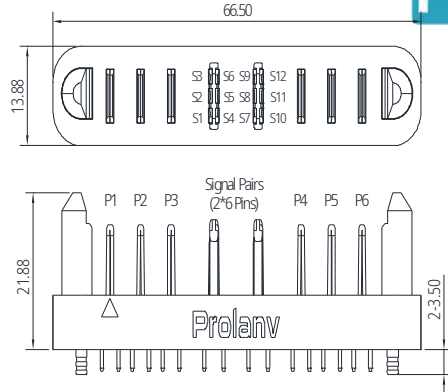

EN60A刀片大电流公座8组电源6信号.折弯式 | EN60A Power Male. 8PW+6S. Straight type

PDC1910F0002




Compatible P/N:
PDC2010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

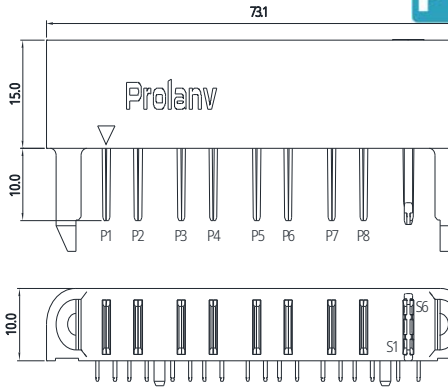

EN60A刀片大电流公座8组电源6信号.直插式 | EN60A Power Male. 9PW+6S. Straight type

PDC1920F0001




Compatible P/N:
PDC2010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

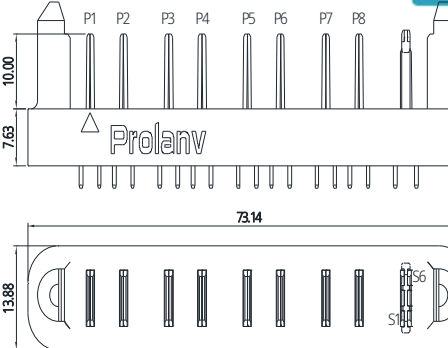

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

EN60A刀片大电流母座8组电源6信号.直插式 | EN60A Power Female. 8PW+6S. Straight type

PDC2010F0001




Compatible P/N:

PDC191/2 0F000 2/1-2-3

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other


* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

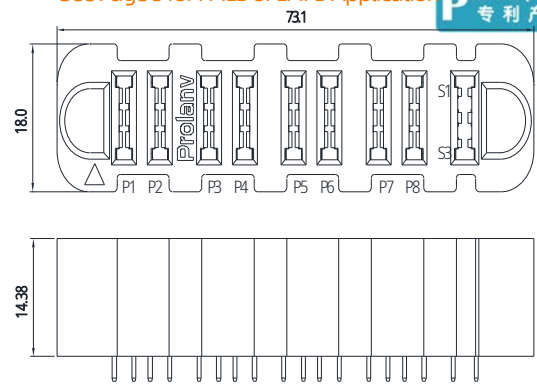

EN60A刀片大电流公座8组电源6信号.直插式 | EN60A Power Male. 8PW+6S. Straight type

PDC1920F0002




Compatible P/N:

PDC2010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

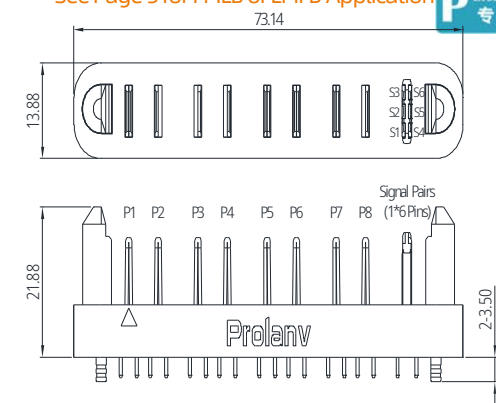

EN60A刀片大电流公座8组电源6信号.直插式 | EN60A Power Male. 8PW+6S. Straight type

PDC1920F0003




Compatible P/N:

PDC2010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

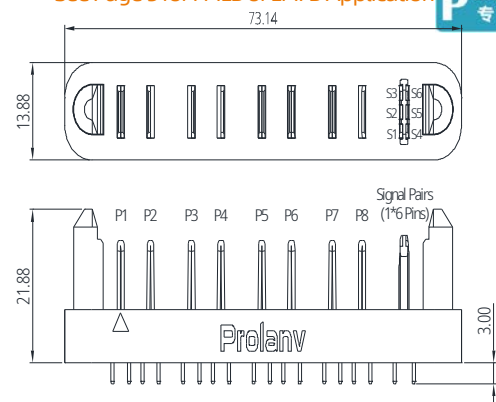

EN60A刀片大电流母座10电源12信号.直插式 | EN60A Power Female. 10PW+12S. Straight type

PDC2210F0001




Compatible P/N:

PDC21 1/2 0F000 1/2-3

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

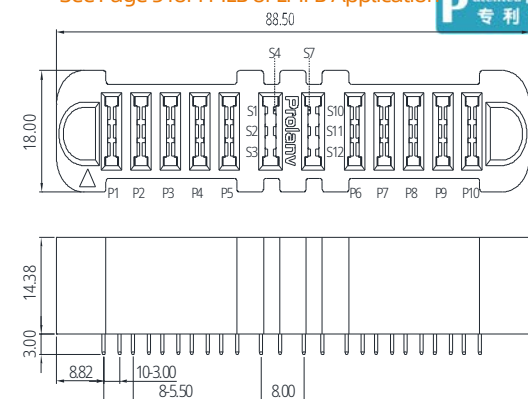

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

EN60A刀片大电流公座10电源12信号.直插式 | EN60A Power Male. 10PW+12S. Straight type

* See Page 5 for FMLB or LMFB Application


Patented product
专利产品

PDC2110F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210F0001

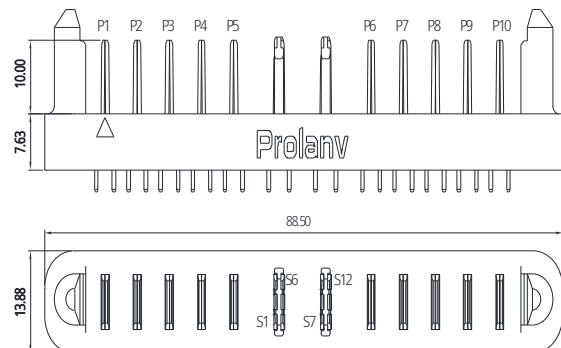

EN60A刀片大电流公座10电源12信号.直插式 | EN60A Power Male. 10PW+12S. Straight type

* See Page 5 for FMLB or LMFB Application


Patented product
专利产品

PDC2120F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210F0001

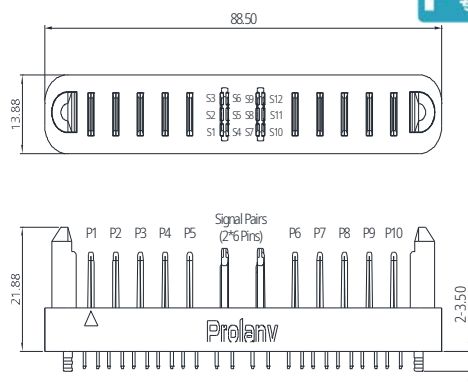

EN60A刀片大电流公座10电源12信号.直插式 | EN60A Power Male. 10PW+12S. Straight type

* See Page 5 for FMLB or LMFB Application


Patented product
专利产品

PDC2120F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210F0001

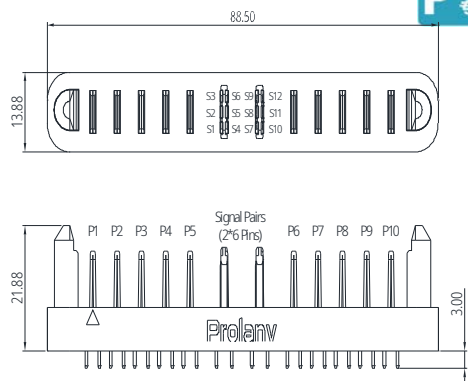

EN60A刀片大电流公座10电源12信号.折弯式 | EN60A Power Male. 10PW+12S. R/A type

* See Page 5 for FMLB or LMFB Application


Patented product
专利产品

PDC2110F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210F0001

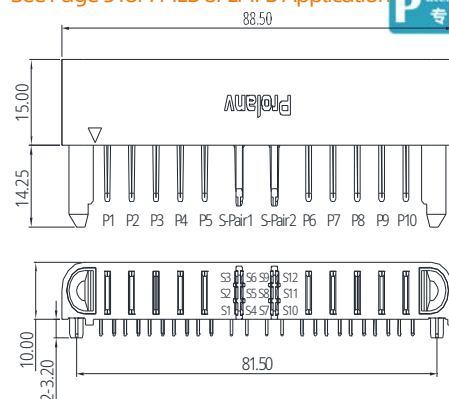

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


EN60A刀片大电流公座7组电源6信号. 折弯式 | EN60A Power Male. 7PW+6S. R/A type

PDC2510F0002



Compatible P/N:
PDC2610F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

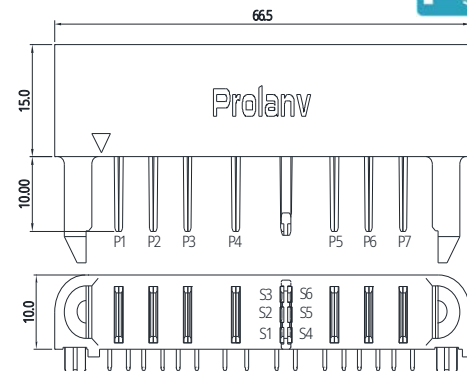

Patented product
专利产品

首页
Home

EN60A刀片大电流母座7组电源6信号. 直插式 | EN60A Power Female. 7PW+6S. Straight type


PDC2610F0001



Compatible P/N:
PDC2510F0002/3

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other


* See Page 5 for FMLB or LMFB Application

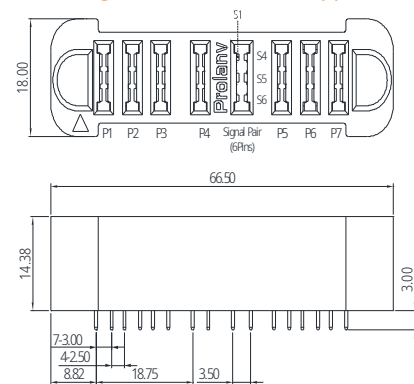

Patented product
专利产品

EN60A刀片大电流公座7组电源6信号.折弯式 | EN60A Power Male. 7PW+6S. R/A type


PDC2510F0003



Compatible P/N:
PDC2610F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other


* See Page 5 for FMLB or LMFB Application

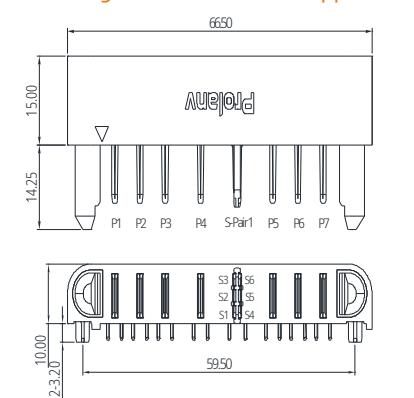

Patented product
专利产品

EN60A刀片大电流母座8组电源12信号. 直插式 | EN60A Power Female. 8PW+12S. Straight type


PDC2810F0001



Compatible P/N:
PDC27 1/20F00013/23

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

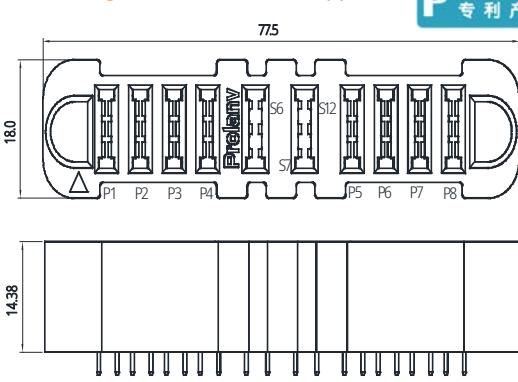


Patented product
专利产品

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


EN60A刀片大电流公座8组电源12信号.直插式 | EN60A Power Male.8PW+12S. Straight type

PDC2710F0001



Compatible P/N:
PDC2810F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

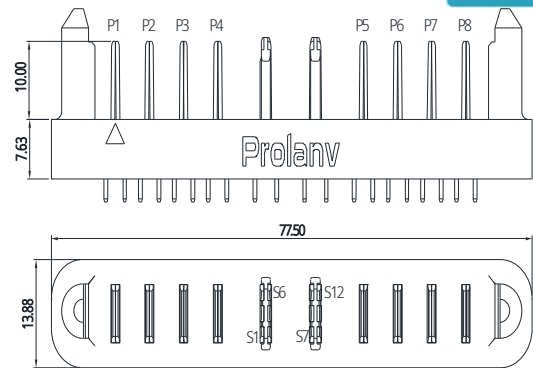

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品


EN60A刀片大电流公座8组电源12信号.折弯式 | EN60A Power Male. 8PW+12S. R/A type

PDC2710F0003



Compatible P/N:
PDC2810F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

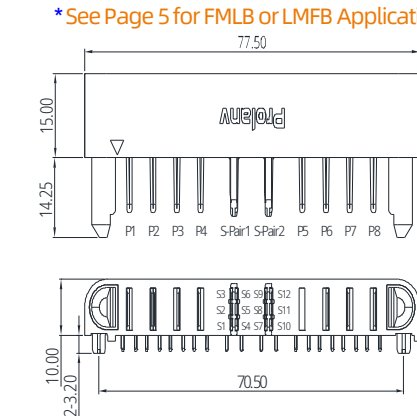


* See Page 5 for FMLB or LMFB Application

Patented product
专利产品


EN60A刀片大电流公座8组电源12信号.直插式 | EN60A Power Male.8PW+12S. Straight type

PDC2720F0002



Compatible P/N:
PDC2810F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

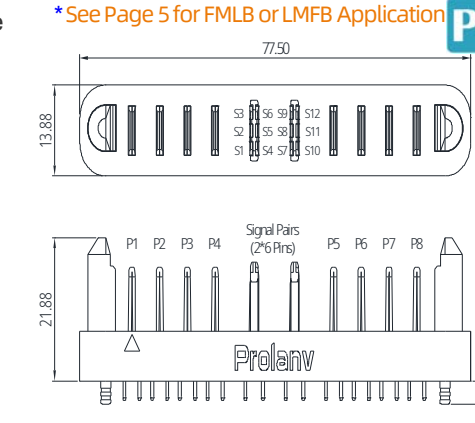

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品


EN60A刀片大电流公座8组电源12信号.直插式 | EN60A Power Male.8PW+12S. Straight type

PDC2720F0003



Compatible P/N:
PDC2810F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

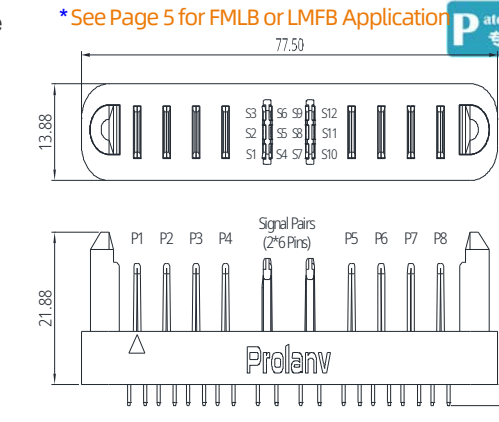

* See Page 5 for FMLB or LMFB Application


Patented product
专利产品

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

EN60A刀片大电流公座12组电源.直插式 | EN60A Power Male. 12PW. Straight type

PDC2910F0001




Compatible P/N:
PDC3010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

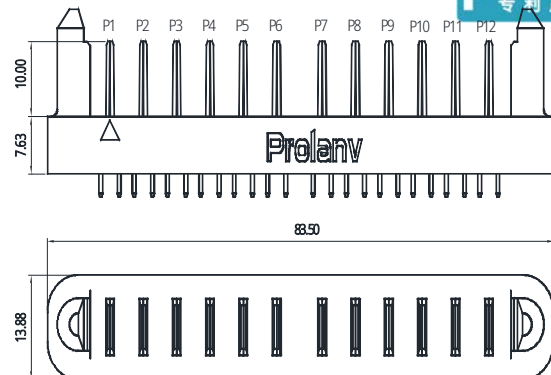

EN60A刀片大电流母座12电源.直插式 | EN60A Power Female. 12PW. Straight type

PDC3010F0001




Compatible P/N:
PDC2910F0001 1.3/2.3

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

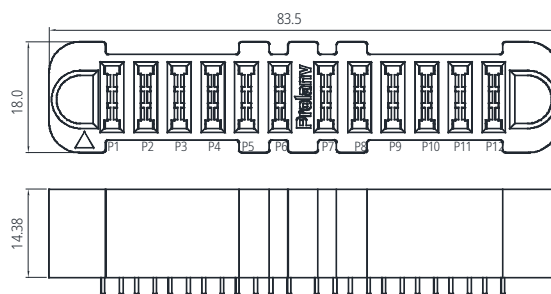

EN60A刀片大电流公座12组电源.折弯式 | EN60A Power Male. 12PW. R/A type

PDC2910F0003




Compatible P/N:
PDC3010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

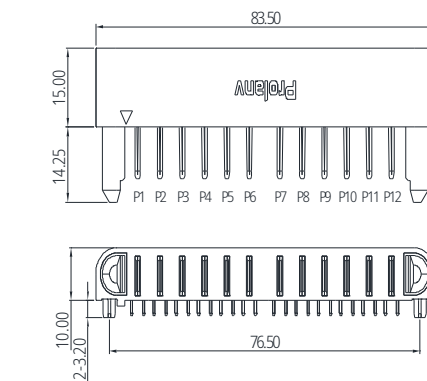

EN60A刀片大电流公座12组电源.直插式 | EN60A Power Male. 12PW. Straight type

PDC2920F0002




Compatible P/N:
PDC3010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

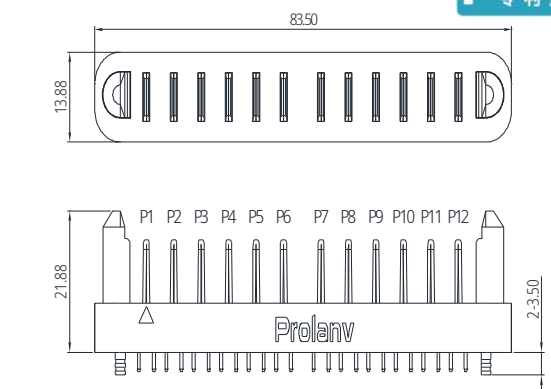


Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

EN60A刀片大电流公座12组电源.直插式 | EN60A Power Male. 12PW. Straight type

PDC2920F0003




Compatible P/N:
PDC3010F0001

电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other


* See Page 5 for FMLB or LMFB Application

Patented product
专利产品

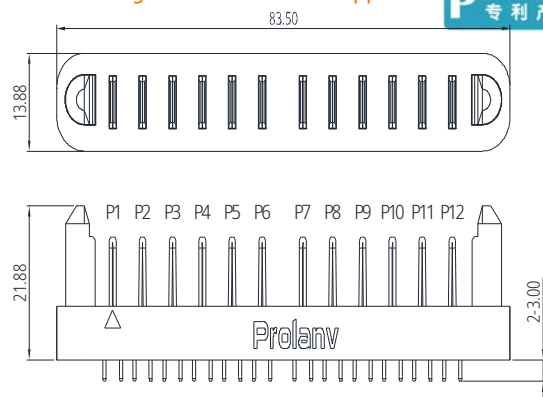

EX150刀片大电流公座4组电源24信号.直立插板式 | EX150 Power Male. 4PW24S. Straight


PDC3320F0001



Compatible P/N:
PDC3410F0001

电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

Patented product
专利产品

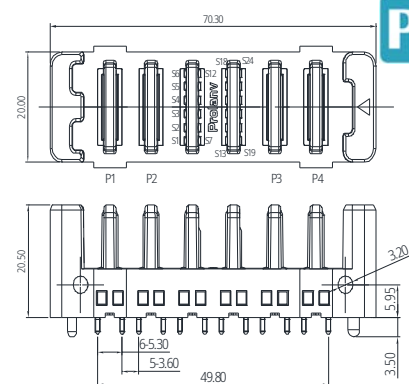

EX150刀片大电流母座4组电源24信号. 直立插板式 | EX150 Power Female. 4PW24S. Straight


PDC3410F0001



Compatible P/N:
PDC3320F0001

电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

Patented product
专利产品

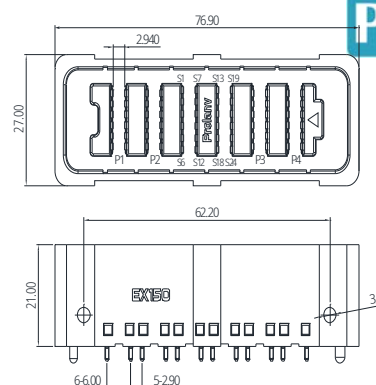

EX150刀片大电流公座4组电源12信号.直立插板式 | EX150 Power Male. 4PW12S .Straight


PDC3330F0001



Compatible P/N:
PDC3410F0002

电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域 Application Field	Drone/Robot/Other

Patented product
专利产品

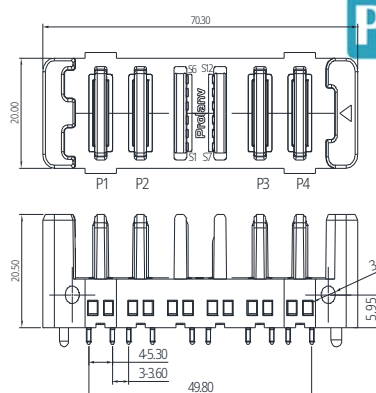

Units: [mm]



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


EX150刀片大电流线座4组电源24信号.直立插板式 | EX150 Power Female. 4PW24S. Straight

PDC3410F0002



Compatible P/N:
PDC3330F0001

电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

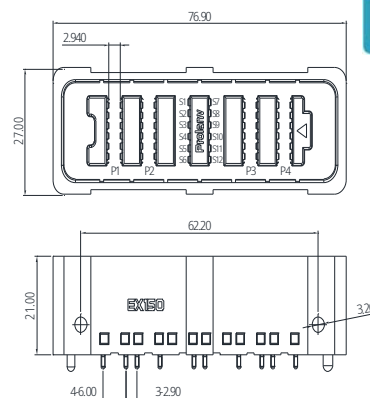

Patented product
专利产品




EX150刀片大电流公座6组电源24信号.直立插板式 | EX150 Power Male. 6PW24S. Straight

PDC3720F0001



Compatible P/N:
PDC3320F0001

电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

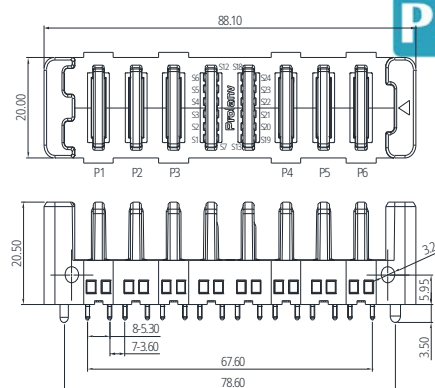

Patented product
专利产品


EX150刀片大电流母座6组电源24信号.直立插板式 | EX150 Power Female. 6PW24S. Straight

PDC3810F0001



Compatible P/N:
PDC3720F0001


电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

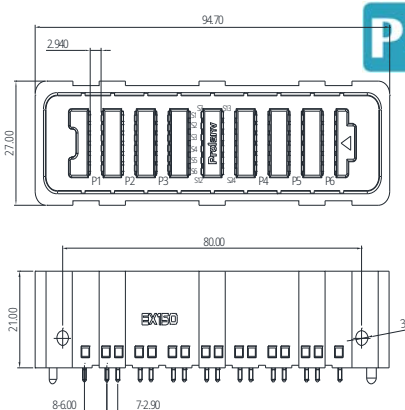

Patented product
专利产品


EX150刀片大电流公座6组电源12信号.直立插板式 | EX150 Power Male. 6PW12S. Straight

PDC3730F0001



Compatible P/N:
PDC3810F0002

电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

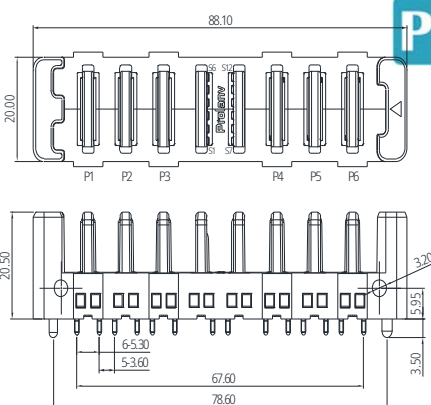

Patented product
专利产品

Units: [mm]



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


EX150刀片大电流母座6组电源24信号.直立插板式 | EX150 Power Female. 6PW24S. Straight

PDC3810F0002



Compatible P/N:
PDC3730F0001


电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/Robot/Other

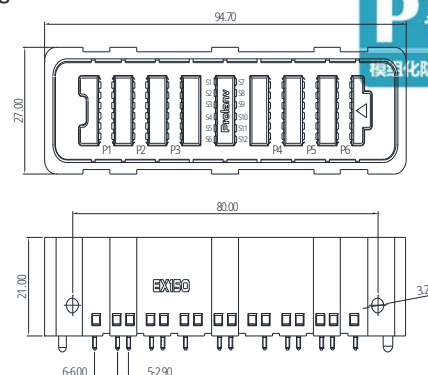

Patented product
专利产品
模压化防水结构 | Waterproof


AT80针式大电流连接器.线端 | AT80 Needle Hi-current Power connector wire-harness

PAT0110BT001



Compatible P/N:
PAT0210BT001


电压Voltage rating	200VDC/max
电流Current rating	80A/Per Pin.
接触电阻Contact resistance	0.8mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-25°C~125°C.
应用领域Application Field	Drone/Robot/IE device...

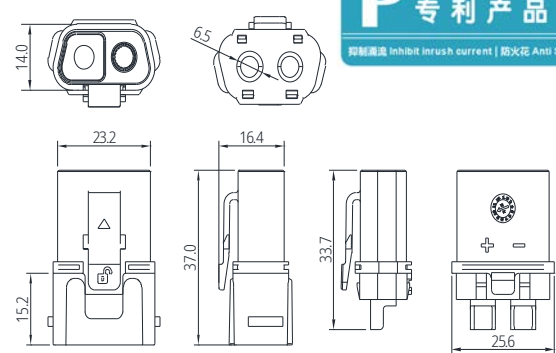

Patented product
专利产品
抑制浪涌 Inhibit inrush current | 防火花 Anti Spark


AT80针式大电流连接器.机身端 | AT80 Needle Hi-current Power connector wire-harness

PAT0210BT001



Compatible P/N:
PAT0110BT001


电压Voltage rating	200VDC/max
电流Current rating	80A/Per Pin.
接触电阻Contact resistance	0.8mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-25°C~125°C.
应用领域Application Field	Drone/Robot/IE device...

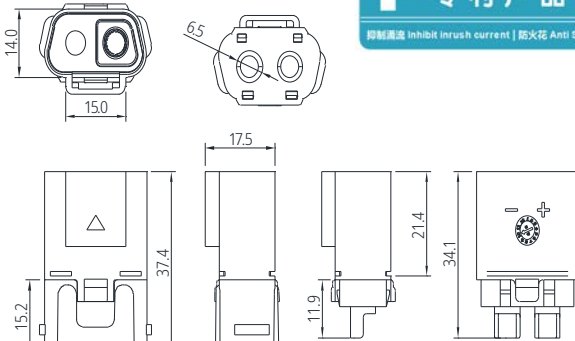

Patented product
专利产品
抑制浪涌 Inhibit inrush current | 防火花 Anti Spark


AT80针式大电流连接器.机身端 | AT80 Needle Hi-current Power connector wire-harness

PAT0220BT001



Compatible P/N:
PAT0110BT001

电压Voltage rating	200VDC/max
电流Current rating	80A/Per Pin.
接触电阻Contact resistance	0.8mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-25°C~125°C.
应用领域Application Field	Drone/Robot/IE device...

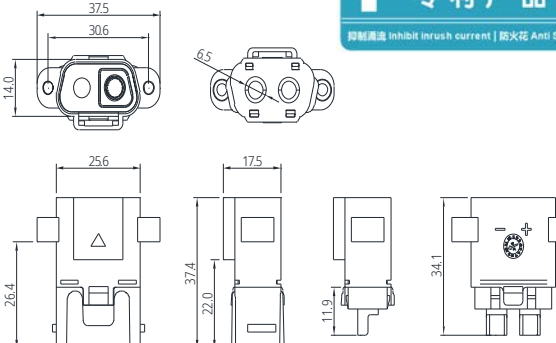

Patented product
专利产品
抑制浪涌 Inhibit inrush current | 防火花 Anti Spark

Units: [mm]


AW40机臂快拆电连接器模块.机身母端 | AW40 quick fit arm connector module

PAW0710C0002



Compatible P/N:
PAW0810C0002

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/IE device...

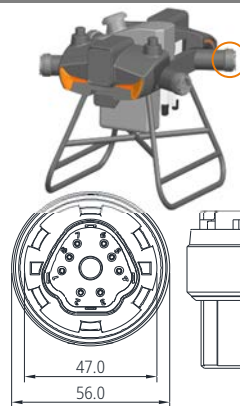


AW40机臂快拆电连接器模块.机臂公端 | AW40 quick fit arm connector module

PAW0810C0002



Compatible P/N:
PAW0710C0002

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/IE device...

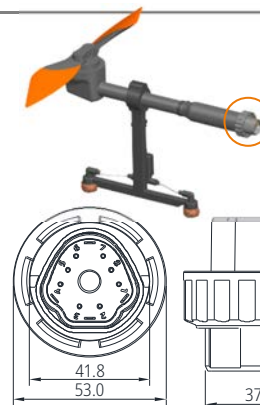


AW40机臂快拆电连接器模块.机身母端 | AW40 quick fit arm connector module

PAW0910C0002



Compatible P/N:
PAW1010C0002

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/IE device...

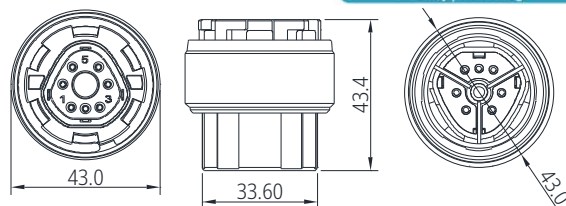


AW40机臂快拆电连接器模块.机臂公端 | AW40 quick fit arm connector module

PAW1010C0002



Compatible P/N:
PAW0910C0002

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/IE device...

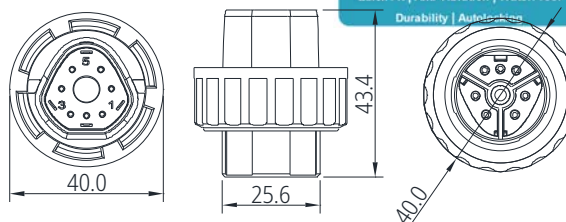



应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device



AW40机臂快拆电连接器模块.机身母端 | AW40 quick fit arm connector module

PAW1110C0001



Compatible P/N:
PAW1210C0001

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/IE device...



可选颜色识别标志
Optional Color control
(红色或白色RD or WH)

匹配管径 Matching tube
外径 OD 49.5mm max.
内径 ID 47.0mm

Patented product
专利产品

快拆 | 抗振 | 防水 | 耐久 | 自锁定
Quick Fit | Anti-Vibration | WaterProof
Durability | Autolocking




AW40机臂快拆电连接器模块.机臂公端 | AW40 quick fit arm connector module

PAW1210C0001



Compatible P/N:
PAW1110C0001

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°C~125°C.
应用领域Application Field	Drone/IE device...



可选颜色识别标志
Optional Color control
(红色或白色RD or WH)

建议匹配管径 REC Match tube
外径 OD 40.5mm max.
内径 ID 38.0mm

Patented product
专利产品

快拆 | 抗振 | 防水 | 耐久 | 自锁定
Quick Fit | Anti-Vibration | WaterProof
Durability | Autolocking





Busbar style M-Terminal 滑轨式/汇流条公端

PBC03-111




Compatible P/N:
PBC04-111

电压Voltage rating	150VDC/max
电流Current rating	75A max./Per pin
接触电阻Contact resistance	0.6mΩ max. Initial
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°C~150°C.
应用领域Application Field	Drone/Robot/IE device...







Busbar style F-Terminal 滑轨式/汇流条母端

PBC04-111



Compatible P/N:
PBC03-111

电压Voltage rating	150VDC/max
电流Current rating	75A max./Per pin
接触电阻Contact resistance	0.6mΩ max. Initial
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°C~150°C.
应用领域Application Field	Drone/Robot/IE device...



Units: [mm]