

# FFM-U8038-150K

sanitary ultrafiltration membrane

<b>PRODUCT</b>	Membrane Chemistry:	Patent polyethersulfone (PES)
<b>DESCRIPTION</b>	Nominal retention accuracy:	150, 000 Dalton
	structure:	Roll type sanitary belt grid
	Choice scope: Diameter:	2.5 ", 4" and 8 "; inlet passage: (31mil), (46mil), (62mil), (80mil)

## Specification

Parameter	Effective membrane area					
	(31mil)	(46mil)	(62mil)	(80mil)	(100mil)	(135mil)
	ft2 (m2)	ft2 (m2)	ft2 (m2)	ft2 (m2)	ft2 (m2)	ft2 (m2)
	370 (34.3)	276 (25.6)	215 (20.0)	--	--	--

Not all combinations are covered. Our company can customize special specifications of membrane components for users.

## OPERATION PARAMETERS


Recommended operating pressure:	30-120 psi (2.1-8.3bar)
Maximum operating pressure:	140psi (9.7bar)
Operating temperature range:	41-131° F (5-55°C)
Cleaning temperature range:	104-122° F (40-50°C)
PH range of continuous operation:	2.0-10.0 (25°C)
PH range of online cleaning:	1.8-11.0 (25°C)

Design pressure drop of single membrane element:

Runner 31mil: 12-15 psi (0.8-1.0 bar)

Runner 46mil: 15-20 psi (1.0-1.4 bar)

Other Runner: 15-25 psi (1.0-1.7 bar)

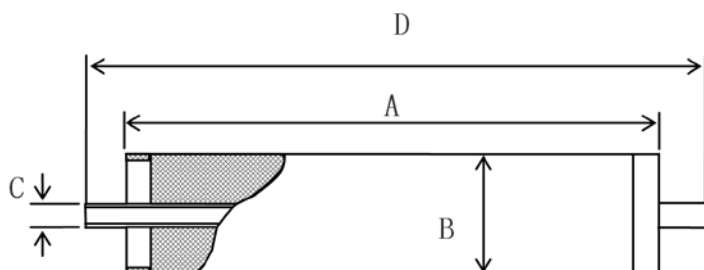

A	B	C	D
inch (mm)	inch (mm)	inch (mm)	inch (mm)
38.0 (965)	7.9 (201)	1.138 (28.9)	--