

We design, build and deliver incredible

Back Lighting

INDLEDs

Created with pride

Eric Junkun Shaw

M: +86 186 8896 6680 E: eric@indleds.com

T: +86 755 2752 2483 W: www.indleds.com

Add: 12F Senhainuo Kechuang Building Shiyuan Shenzhen 518101 P.R.China

All copyright © 2020 INDLEDs Co., Ltd. All rights reserved. Specification and designs are subject to change without notice.
All data were deemed correct at time of creation. INDLEDs are not liable for errors or omissions.



Meseum Stretch Ceiling Back Lighting



Performance Series

TTPL4 12~25cm Depth Back Lighting



Tunable White

DC22~26V Voltage Range	1.2Watt Power	144Lm Luminous Flux	PWM/DALI /CASAMBI Dimmable	160° View Angle	(L)118*(W)18*(H)10.1mm Size	≤5% Lumen Difference Between First and Last
66 IP	7 year Warranty	-40—85C° Operation Temperature	94V-2 Flame Resistance	93 Ra	79 R9	89 Rf
98 Rg	Mounting Profile M3 Screw 3M VHB 5611 Tape Mounting	CE/RoHS Certificate	30pcs/m² Density	Connector Accessory	2700K ~ 6500K Tunable White	5.3m Max Run Length



Frosted Glass Back Lighting

Performance Series

TPL4 18~25cm Depth Back Lighting



DC22~26V Voltage Range	2.4 Watt Power	288 _{lm} Luminous Flux	PWM/DALI Dimmable	160° View Angle	(L)118*(W)18*(H)10.1mm Size	≤5% Lumen Difference Between First and Last	
66 IP	5year Warranty	-40—85C° Operation Temperature	5.3m Max Run Length	93 Ra	79 R9	89 Rf	98 Rg
3 Macadam ellipse	Mounting Profile M3 Screw 3M VHB 5611 Tape Mounting	CE/RoHS Certificate	15pcs/m² Density	Connector Accessory	2700K 3000K 3500K 4000K 5000K 6500K Light Color		94V-2 Flame Resistance

Museum Acrylic Panel Back Lighting



Performance Series TPL2 12~18cm Depth Back Lighting




DC22~26V Voltage Range	1.2Watt Power	144lm Luminous Flux	PWM/DALI Dimmable	160° View Angle	(L)79×(W)18×(H)10.1mm Size	≤5% Lumen Difference Between First and Last	
66 IP	7year Warranty	-40—85C° Operation Temperature	8.7m Max Run Length	93 Ra	79 R9	89 Rf	98 Rg
3 Macadam ellipse	Mounting Profile M3 Screw 3M VHB 4950 Tape Mounting	CE/RoHS Certificate	30pcs/m² Density	Connector Accessory	2700K 3000K 3500K 4000K 5000K 6500K Light Color		94V-2 Flame Resistance




Professional Sereis

T2 12~18cm Depth Back Lighting

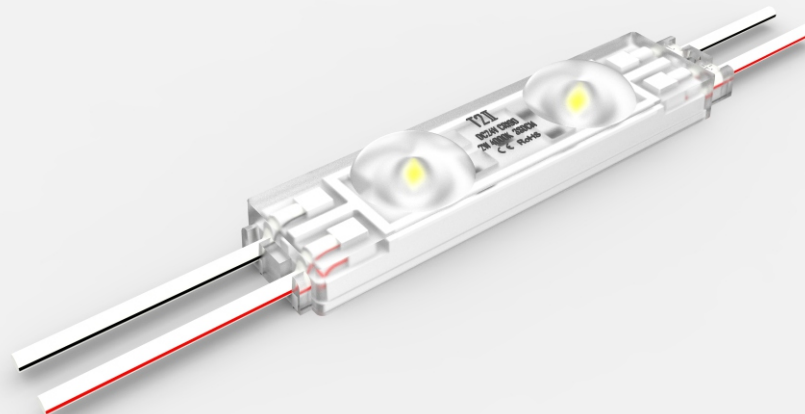


DC22~26V Voltage Range	2 Watt Power	156 _{lm} Luminous Flux	PWM/DALI Dimmable	160° View Angle	(L)72.5*(W)16*(H)9.5mm Size	≤5% Lumen Difference Between First and Last	
66 IP	7 year Warranty	-40—85C° Operation Temperature	8.7m Max Run Length	93 Ra	79 R9	89 Rf	98 Rg
3 Macadam ellipse	Mounting Profile: M3 Screw 3M VHB 4950 Tape Mounting	CE/RoHS Certificate	37pcs/m ² Density	Connector Accessory	2700K 3000K 3500K 4000K 5000K 6500K Light Color	94V-2 Flame Resistance	

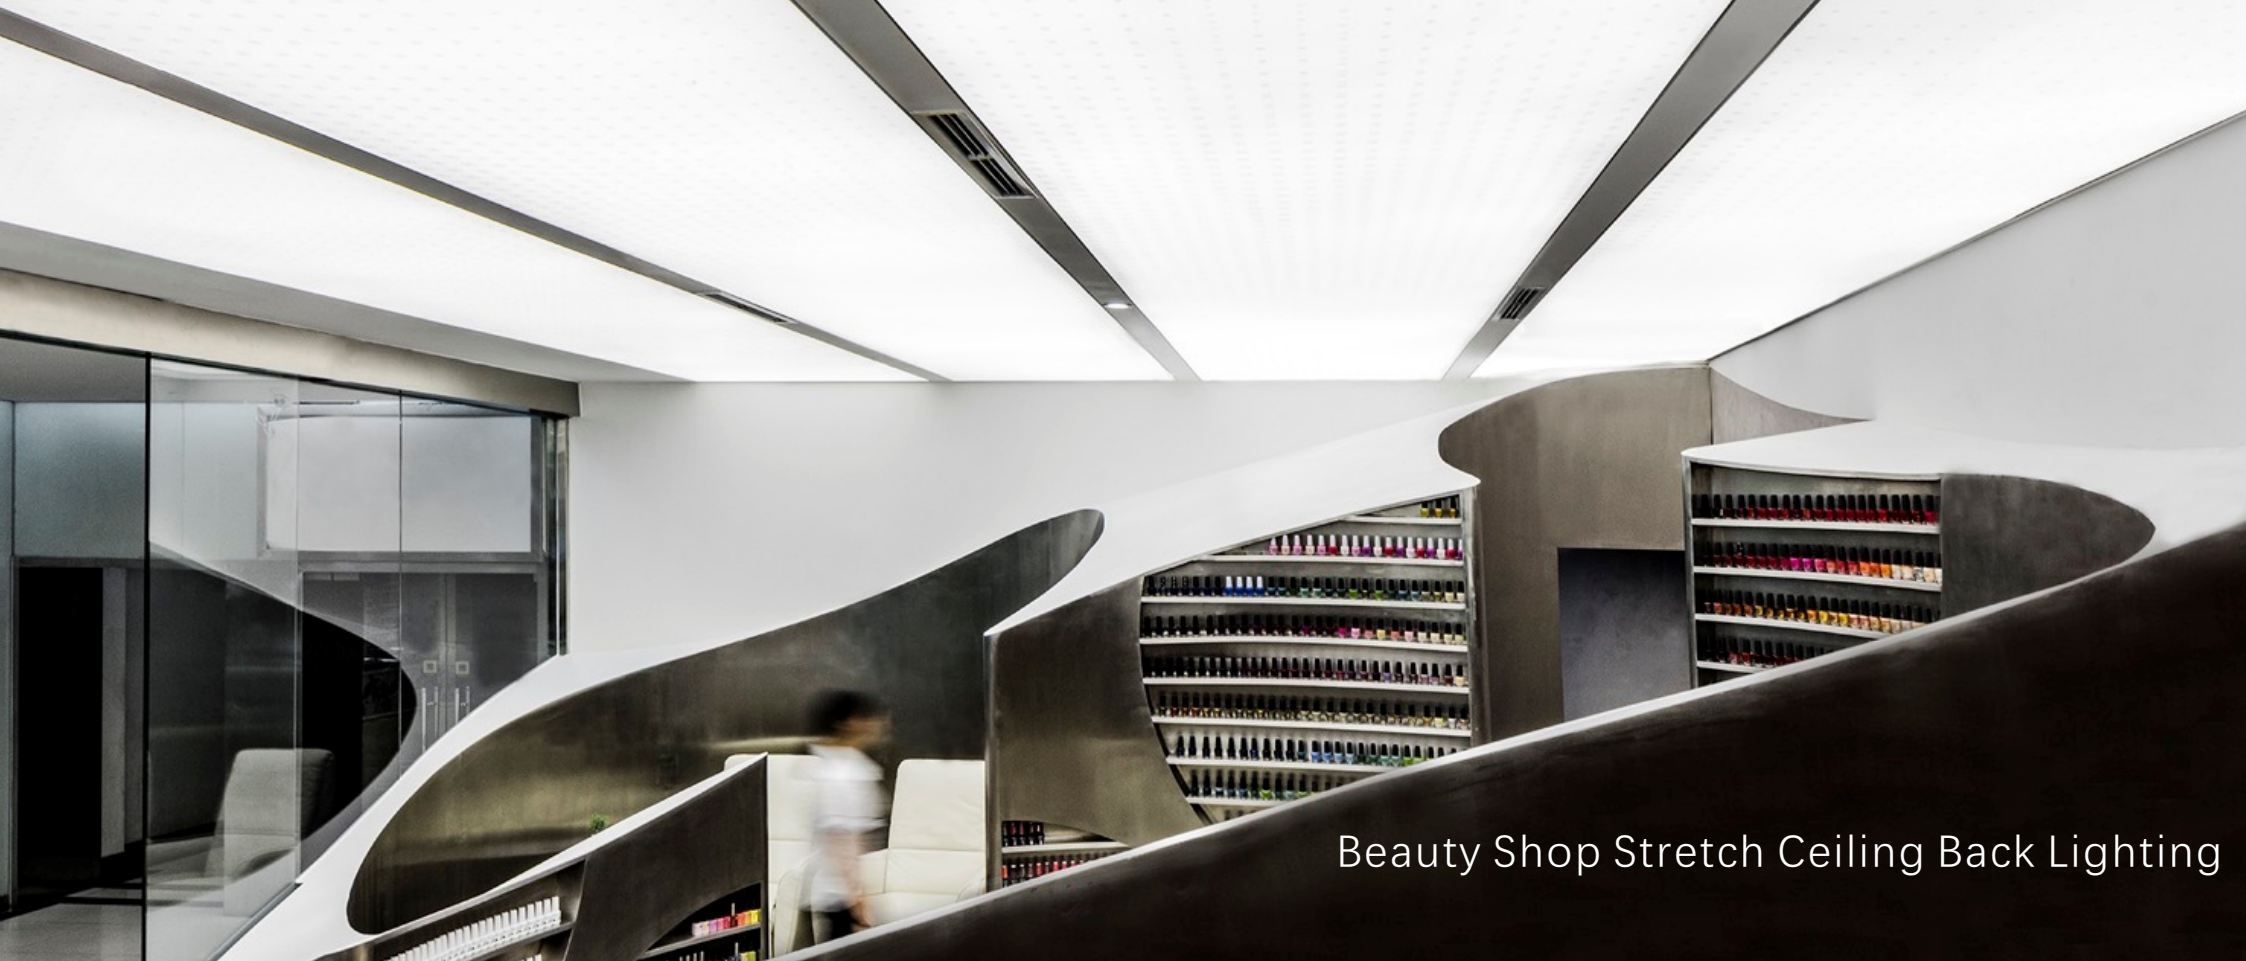

Beauty Shop Stretch Ceiling Back Lighting

Professional Series

TS 6~12cm Depth Back Lighting

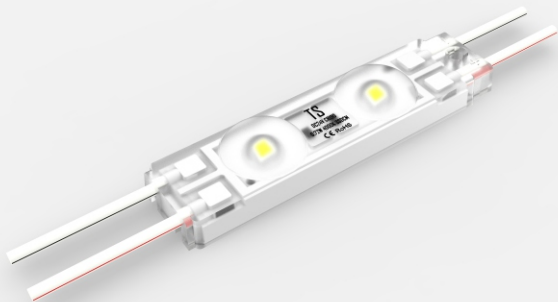

DC22~26V Voltage Range	0.72Watt Power	58lm Luminous Flux	PWM/DALI Dimmable	160° View Angle	(L)57.5*(W)14*(H)9.5mm Size	≤5% Lumen Difference Between First and Last	
66 IP	7year Warranty	-40—85C° Operation Temperature	7.8m Max Run Length	93 Ra	79 R9	89 Rf	98 Rg
3 Macadam ellipse	Mounting Profile M3 Screw 3M VHB 4950 Tape Mounting	CE/RoHS Certificate	100pcs/m ² Density	Connector Accessory	2700K 3000K 3500K 4000K 5000K 6500K Light Color	94V-2 Flame Resistance	