

INDLED

Created with pride



To us, good Luminarie is a matter of  
**problem solving, performance,  
durability, and aesthetics**

# Content

## Living Space Lighting

---

Disc EVO Pendant	2
Disc EVO Floor	3
Sowoodly EVO Floor	4
Sowoodly EVO Tabel	4
Dot EVO	5
Flèche Wall	6

---

## Dining Space Lighting

---

Stick EVO	8
Glowrail EVO Direct	9
Slim EVO Wood	10
Glowrail EVO Direct Stainless	11
Camber EVO	12
Sowoodly EVO Pendant	13
Cheflite	14

---

## Work Space Lighting

---

Line 9	16
Line 12	17
Line 24	18
Slim EVO	19
Slim EVO Acoustic	20
Glowrail EVO Indirect	21
Grid EVO	22

---

## Corridor Lighting

---

Flèche Suspended	23
------------------	----



# Living Space Lighting

Disc EVO Pendant



Disc EVO Floor



Sowoodly EVO Floor



Sowoodly EVO Tabel



Dot EVO




Flèche Wall





## Disc EVO Pendant

DISC EVO Pendant solves two problems at once:  
creates bright comfortable ambient lighting  
and glare-free smooth task lighting



Luminous Intensity Distribution

UGR	< 9
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	160 Direct
	130 Indirect
Luminous lux(lm)	1440 Direct
	4990 Indirect
Beam angle	64° Direct
	160° Indirect
SDCM	≤ 3
CCT	2700/3000K
Watt	9 Direct
	38.4 Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Oak
Dimension	D300*33.5mm
Warranty	5 years
Net Weight	1.35kg
Certificate	CE RoHS
Installation	Pendant
Model	ZL3P



Disc EVO Floor

UGR	< 9
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	720/4990 Direct/Indirect
Beam angle	64°/160° Direct/Indirect
SDCM	≤ 3
CCT	2700/3000K
Watt	4.5/38.4 Direct/Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Oak
Dimension	D300*1775mm
Warranty	5 years
Net Weight	9.85kg
Certificate	CE RoHS CCC
Installation	Floor Lamp
Model	ZL3F

DISC EVO Floor solves two problems at once: creates bright comfortable ambient lighting and glare-free smooth reading lighting



Luminous Intensity Distribution



Sowood EVO Floor



Sowood EVO Tabel

UGR	< 9
CRI	≧ 92
R9	≧ 70
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	720/4990 Direct/Indirect
Beam angle	64°/160° Direct/Indirect
SDCM	≦ 3
CCT	2700/3000K
Watt	4.5/38.4 Direct/Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Maple
Dimension	D300*1500mm/D300*500mm
Warranty	5 years
Net Weight	9.85kg/4kg
Certificate	CE RoHS
Installation	Floor/Table Lamp
Model	ZL3FS ZL3TS

Sowood EVO solve two problems at once:  
create bright comfortable ambient lighting  
and vision interest in space



Luminous Intensity Distribution



## Dot EVO

UGR	< 9
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	160
Luminous lux(lm)	960
Beam angle	64°
SDCM	≤ 3
CCT	2700/3000K/4000K
Watt	6
Voltage	220-240V
Surface color	Ra9016
Dimension	D70*40mm
Warranty	5 years
Net Weight	0.155kg
Certificate	CE RoHS
Installation	Surface mounted
Model	DE6

Dot EVO solves two problems at once:  
creates glare-free smooth direct lighting and  
almost invisible surface mounted.



64°

Luminous Intensity Distribution

## Flèche Wall

CRI	≧ 92
R9	≧ 70
Efficacy (lm/w)	130
Luminous lux(lm)	2900
Beam angle	75°
SDCM	≦ 3
CCT	2700/3000K/4000K
Watt	22.4
Voltage	220-240V
Controls	NO
Surface color	Ra9016
Dimension	76.7*31*1000mm
Warranty	5 years
Net Weight	0.55kg
Certificate	CE RoHS
Installation	Wall mounted
Model	FCW100

Flèche Wall solves two problems at once:  
creates bright comfortable ambient lighting  
and is minimal for integration into the wall.



Luminous Intensity Distribution



## Dining Space Lighting

Stick EVO 

Glowrail EVO Direct 

Slim EVO Wood 

Glowrail EVO Direct Stainless 

Camber EVO 

Sowood EVO Pendant 

Cheflite 



Stick EVO

UGR	< 12
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	2160/3750 Direct/Indirect
Beam angle	73°/160° Direct/Indirect
SDCM	≤ 3
CCT	2700/3000K
Watt	13.5/28.8 Direct/Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Walnut
Dimension	1280*35*30mm
Warranty	5 years
Net Weight	2.8kg
Certificate	CE RoHS
Installation	Pendant
Model	YK1280

STICK EVO solves three problems at once: creates bright comfortable ambient lighting and glare-free smooth task lighting and can be applied in the Morden/ Contemporary/Janpandi Scandinavian/Minimalist interior style



Luminous Intensity Distribution



## Glowrail EVO Direct

UGR	< 12
CRI	≧ 92
R9	≧ 70
Efficacy (lm/w)	160
Luminous lux(lm)	2160
Beam angle	73°
SDCM	≦ 3
CCT	2700/3000K/4000K
Watt	13.5
Voltage	220-240V
Controls	NO
Surface color	Ra9016
Dimension	D25*1234mm
Warranty	5 years
Net Weight	1.2kg
Certificate	CE RoHS
Installation	Pendant
Model	GED12

Glowrail EVO Direct solves two problems at once: creates bright glare-free smooth task lighting and can be applied in several content like the Janpandi Morden/Contemporary/Scandinavian/Minimalist interior style



73°

Luminous Intensity Distribution



Slim EVO Wood

UGR	< 12
CRI	≥ 93
R9	≥ 90
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	2160/3750 Direct/Indirect
Beam angle	73°/160° Direct/Indirect
SDCM	≤ 3
CCT	2700/3000K/4000K
Watt	13.5/28.8 Direct/Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Oak /Walnut/Beech
Dimension	1286*26*53.2mm
Warranty	5 years
Net Weight	2.12kg
Certificate	CE RoHS
Installation	Pendant
Model	ZLJW1286

SLIM EVO Wood solves three problems at once: creates bright comfortable ambient lighting and glare-free smooth task lighting and can be applied in the Janpandi/ Morden/ Contemporary Scandinavian/Minimalist interior style



Luminous Intensity Distribution



Glowrail EVO Direct Stainless

UGR	< 9
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	160
Luminous lux(lm)	4560
Beam angle	64°
SDCM	≤ 3
CCT	2700/3000K/4000K
Watt	28.5
Voltage	220-240V
Controls	NO
Surface color	304 Stainless Steel
Dimension	D44*2000mm
Warranty	5 years
Net Weight	5.3kg
Certificate	CE RoHS
Installation	Pendant
Model	GEDS20

Glowrail EVO Direct Stainless solves two problems at once: creates bright comfortable ambient lighting and can be applied in the Modern/ Contemporary/Minimalist interior style



64°


Luminous Intensity Distribution



Camber EVO

UGR	< 12
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	2160/3750 Direct/Indirect
Beam angle	73°/160° Direct/Indirect
SDCM	≤ 3
CCT	2700/3000K
Watt	13.5/28.8 Direct/Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Oak/Walnut/Beech
Dimension	1280*33.5*31.5mm
Warranty	5 years
Net Weight	1.75kg
Certificate	CE RoHS
Installation	Pendant
Model	CE12

Camber EVO solves three problems at once: creates bright comfortable ambient lighting and glare-free smooth task lighting and can be applied in the Janpandi/ Morden/ Contemporary Scandinavian/Minimalist interior style



Luminous Intensity Distribution



## Sowody EVO Pendant

UGR	< 9
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	1440/4990 Direct/Indirect
Beam angle	64°/160° Direct/Indirect
SDCM	≤ 3
CCT	2700/3000K
Watt	9/38.4 Direct/Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Maple
Dimension	D300*180mm
Warranty	5 years
Net Weight	3.2kg
Certificate	CE RoHS
Installation	Pendant
Model	ZL3P

Sowody EVO Pendant solves three problems at once: creates comfortable ambient lighting and glare-free task lighting and vision interest in space



Luminous Intensity Distribution



Cheflite

UGR	< 12
CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	137
Luminous lux(lm)	480
Beam angle	73°
SDCM	≤ 3
CCT	3000K/4000K
Watt	3.5
Voltage	220-240V
Controls	Touchless Dim
Surface color	Black
Dimension	290*26*16.5mm
Warranty	5 years
Net Weight	0.135kg
Certificate	CE RoHS
Installation	Surface Mounted
Model	DCZG





ChefLite creates bright shadowless task lighting on the stove



Luminous Intensity Distribution



Work Space Lighting

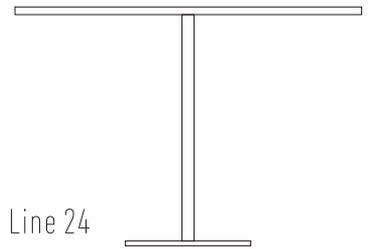



Line 9

UGR	< 9
CRI	≥ 93
R9	≥ 90
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	2300/8740 Direct/Indirect
Beam angle	64°/160° Direct/Indirect
SDCM	≤ 3
CCT	4000K
Watt	14.4/67.2 Direct/Indirect
Voltage	220-240V
Controls	Touch dim & Motion sensor
Surface color	Ra9016
Dimension	1206*450*1950mm
Warranty	5 years
Net Weight	15.6kg
Certificate	CE RoHS
Installation	Floor Lamp
Model	ZL09

Line 9 solves two problems at once: creates bright and comfortable ambient lighting and homogeneous glare-free task lighting for children



Luminous Intensity Distribution



Line 12

UGR	< 9
CRI	≥ 93
R9	≥ 90
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	3286/12480 Direct/Indirect
Beam angle	64°/160° Direct/Indirect
SDCM	≤ 3
CCT	4000K
Watt	20.5/96 Direct/Indirect
Voltage	220-240V
Controls	Touch dim & Motion sensor
Surface color	Ra9016
Dimension	1206*450*1950mm
Warranty	5 years
Net Weight	15.6kg
Certificate	CE RoHS
Installation	Floor Lamp
Model	ZL12

Line 12 solves two problems at once: creates comfortable ambient lighting and glare-free homogeneous task lighting for executive workstations



Luminous Intensity Distribution



Line 24

UGR	< 9
CRI	≥ 93
R9	≥ 90
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	6572/24960 Direct/Indirect
Beam angle	64°/160° Direct/Indirect
SDCM	≤ 3
CCT	4000K
Watt	41/192 Direct/Indirect
Voltage	220-240V
Controls	Touch dim
Surface color	Ra9016
Dimension	2400*450*1950mm
Warranty	5 years
Net Weight	25.8kg
Certificate	CE RoHS
Installation	Floor Lamp
Model	ZL24

Line 24 solves two problems at once: creates comfortable ambient lighting and glare-free homogeneous task lighting for public workstations



Luminous Intensity Distribution



Slim EVO

UGR	< 12
CRI	≥ 93
R9	≥ 90
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	2160/3750 Direct/Indirect
Beam angle	73°/160° Direct/Indirect
SDCM	≤ 3
CCT	4000K
Watt	13.5/28.8 Direct/Indirect
Voltage	220-240V
Controls	Touchless dim
Surface color	Ra9016
Dimension	1286*26*52.2mm
Warranty	5 years
Net Weight	2.12kg
Certificate	CE RoHS
Installation	Pendant
Model	ZLJ1286

SLIM EVO solves two problems at once: creates comfortable ambient lighting and glare-free homogeneous task lighting for public workstations



Luminous Intensity Distribution



Slim EVO Acoustic

UGR	< 12
CRI	≥ 93
R9	≥ 90
Efficacy (lm/w)	160/130 Direct/Indirect
Luminous lux(lm)	2160/3750 Direct/Indirect
Beam angle	73°/160° Direct/Indirect
SDCM	≤ 3
CCT	4000K
Watt	13.5/28.8 Direct/Indirect
Voltage	220 - 240V
Controls	Touchless dim
Surface color	Dark Red/Light Gray/Light Green PET
Dimension	1302*44*53.2mm
Warranty	5 years
Net Weight	2.14kg
Certificate	CE RoHS
Installation	Pendant
Model	ZLJA13

SLIM EVO Acoustic solves four problems at once: creates comfortable ambient lighting and glare-free homogeneous task lighting for public workstations, improves acoustic and match office interior design



Luminous Intensity Distribution



Glowrail EVO Indirect

CRI	≧ 92
R9	≧ 70
Efficacy (lm/w)	130
Luminous lux(lm)	3700
Beam angle	160°
SDCM	≦ 3
CCT	2700/3000K/4000K
Watt	28.8
Voltage	220-240V
Controls	NO
Surface color	Ra9016
Dimension	D25*1234mm
Warranty	5 years
Net Weight	1.2kg
Certificate	CE RoHS
Installation	Pendant
Model	GEI12

Glowrail EVO Indirect creates bright comfortable homogeneous ambient lighting



160°

Luminous Intensity Distribution



GRID EVO

UGR	< 9
CRI	≥ 93
R9	≥ 90
Efficacy (lm/w)	160
Luminous lux(lm)	3840
Beam angle	73°
SDCM	≤ 3
CCT	4000K
Watt	24
Voltage	220-240V
Controls	NO
Surface color	Ra9003
Dimension	595*595*19mm
Warranty	5 years
Net Weight	4.75kg
Certificate	CE RoHS
Installation	Recessed
Model	G59

GRID EVO I creates glare-free bright task lighting



73°

Luminous Intensity Distribution



## Corridor Lighting

Flèche Suspended

CRI	≥ 92
R9	≥ 70
Efficacy (lm/w)	130
Luminous lux(lm)	2900
Beam angle	160°
SDCM	≤ 3
CCT	2700/3000K/4000K
Watt	22.4
Voltage	220-240V
Controls	NO
Surface color	Anodizing
Dimension	76.7*31*1000mm
Warranty	5 years
Net Weight	1.2kg
Certificate	CE RoHS
Installation	Pendant
Model	FCS100

Flèche Suspended creates bright comfortable homogeneous ambient lighting



Luminous Intensity Distribution

# INDLED

Created with pride

Eric Junkun Shaw

W: [www.indled.com](http://www.indled.com) E: [eric@indleds.com](mailto:eric@indleds.com) M: +86 186 8896 6680 T: +86 755 2752 2483

Add: 402 Workshop, B3 Lift, B building, Jinkaijin Industry Park, Shiyan town, Bao'an District, Shenzhen, China

All copyright © 2023 INDLED Co., Ltd. All rights reserved. Specification and designs are subject to change without notice. All data were deemed correct at time of creation. INDLED are not liable for errors or omissions