

1ft Tile



2-in-1 Power&Data Interface



Cascade Available




100% Front&Rear Service

Altair Outdoor

🌀 Portable and Durable 🌀

P6 | P9

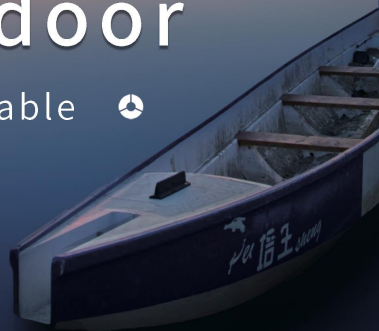

Altair Series




- Aluminum frame materials Lighter&compatible
- Support both front and rear installation and maintenance
- Superior integrated design



Product parameters

Model No.	AL 6	AL 9
Pixel Pitch	6.35mm	9.52mm
LED Type	SMD2727	SMD2727
Pixel Density	24649pixel/m ²	11025pixel/m ²
Brightness	6000-6500nits	6000-6500nits
Color Temperature	6500-9500k	6500-9500k
Scan	1/6	1/4
Panel Dimension	48"X36"X3.5"	36"X36"X3.5"
Panel Resolution	192*144pixel	96*96 pixel
Panel Weight	35kg/77.17lb	30kg/66.14lb
Cabinet Material	Aluminum	Aluminum
Max Power Consumption	≤750w/m ²	≤650w/m ²
AVG Power Consumption	≤275w/m ²	≤325w/m ²
Viewing Angle	H≥160° V≥115°	
Refresh Rate	1920Hz/3840Hz	
Gray Scale	14-16bit	
IP Rating	IP65	
Lifetime	50000hrs	
Operating Temp/Humidity	-20°C~+40°C; 10%-90%RH	
Storage Temp/Humidity	-40°C~+60°C; 10%-60%RH	

- Metal shutter for attractive and durable
- Double silicon give potting on tiles

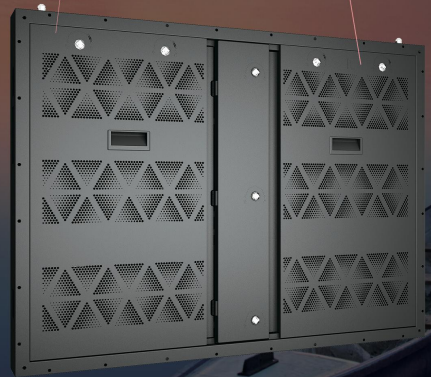

*This parameter table is for reference only. The details can be consulted by scanning code.



Add: North Hall 1203D65,Cangsong Bldg, Tairan 6th Road, Futian District, Shenzhen 518040

Tel: (+86)755-28991020

Email: sales@neovision.tech