



OUTDOOR LED DISPLAY

FXIP SERIES

PROFESSIONAL PARADE PERFORMANCE BIG SCREEN
DESIGNED FOR EFFICIENT STAGE CONSTRUCTION

W23.6" × H47.2"



with Touring Frame



Curving Options



Full Waterproof



Easy Repair




Modular Design



Packed by Dolly Cart



with Touring Frame

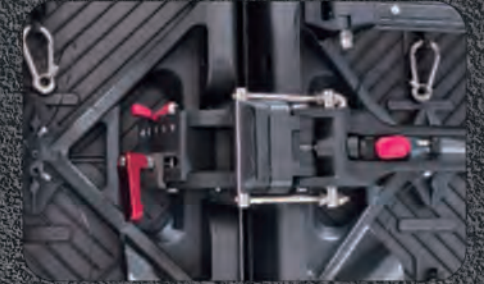

Curved Lock

PARAMETERS

Model No.	F3IP	F5IP	F8IP
Pixel Pitch	3.75mm	5.77mm	8.33mm
LED Type	SMD1921(black)	SMD1921(black)/SMD1921(white)	SMD1921(black)/SMD1921(white)
Pixel Density	71111 pixel/m ²	30044 pixel/m ²	14400 pixel/m ²
Brightness	4500 - 5000 nits	4500 - 5000 nits/5500 - 6000 nits	4500 - 5000 nits/5500 - 6000 nits
Color Temperature	6500 - 9500K	6500 - 9500K	6500 - 9500K
Scan Rate	1/16	1/4	1/3
Panel Resolution	160*320pixel	104*208pixel	72*144pixel
Panel Dimension(W*H*D)	600X1200X95mm(23.6"X47.2"X3.74")		
Panel Weight	22kg(48.5lb)±10%		
Cabinet Material	Die-casting Aluminum		
Max Power Consumption	≤ 850w/m ²		
Ave Power Consumption	≈ 425w/m ²		
Viewing Angle	H:160° V:140°		
Refresh Rate	3840Hz		
Gray Scale	14-16bit		
Working Voltage	AC100-240V~ 50/60Hz		
IP Rating	IP65		
Curve	20m		
Max Stacking/Hanging	-10 ~ +10		
Lifetime	50,000 h		
Operating Temp/Humidity	-20℃ ~ +45℃; 10% ~ 90%RH		
Storage Temp/Humidity	-40℃ ~ +60℃; 10% ~ 60%RH		

*Parameters are for reference only.

*Products are subject to upgrades or changes without prior notice.