



AR Series




- ① Ultra high bearing capacity with more than 1.5 tons
- ② Edge-wrapping aided design, Higher end atmosphere

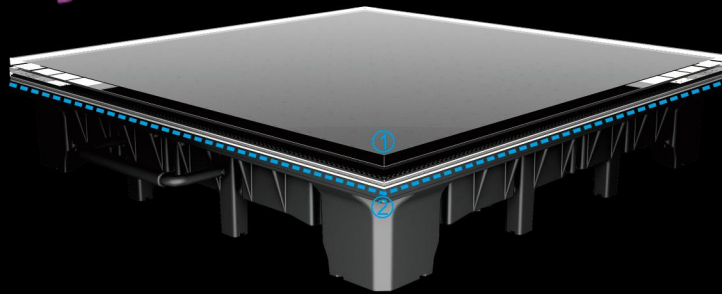


Unique panel bevelled design ,More in line with the needs of stage lifting

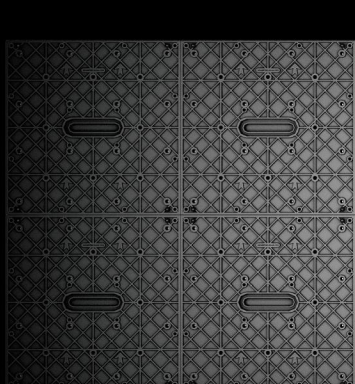

+

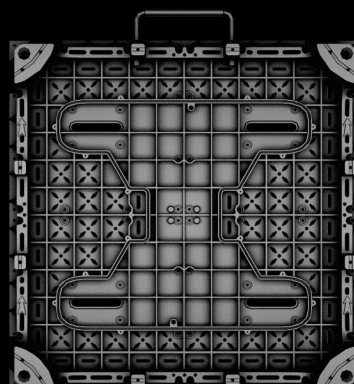

+



Integrated panel design



CCTV Spring Festival Gala -Shenzhen parallel sessions 3100m² AR4.81

Model No.	AR 2.6	AR 3.91	AR 4.81
Pixel Pitch	2.6mm	3.91mm	4.81mm
LED	SMD1515	SMD1921	
Pixel Density	147456pixel/m ²	65536pixel/m ²	43264pixel/m ²
Brightness	500-700nits	800-1200nits	
Color Temperature	6500-9500K		
scan	1/24	1/16	1/13
Panel Dimension(W*H*D)	500mmX500mmX99mm 19.7"×19.7"×0.9"		
Panel Resolution	192×192pixel	128×128pixel	104×104pixel
Panel Weight	12.95kg/30lb		
Cabinet Material	magnesium alloy		
Max Power Consumption	≤620w/m ²		
Average Power Consumption	≤210w/m ²		
Viewing Angle	H:160° V:160°		
Refresh Rate	3840Hz		
Gray Scale	14-16bit		
IP Rating	IP30	Front IP65,Rear IP54	
Operating Humidity	10%-90%RH		
Operating Temperature	-20°C~+50°C		
Lifetime	50,000h		
Storage Temp/Humidity	-40°C~+60°C;10%-60%RH		

 **Neovision Tech Co.,Ltd**

Add: North Hall 1203D65,Gangsong Bldg, Tairan 6th Road, Futian-District, Shenzhen 518040

Tel: (+86)755-28991020

Email: sales@neovision.tech