



深圳显昶光电科技有限公司

Shenzhen Xianyang Optoelectronic Technology Co., Ltd

PRODUCTION SPECIFICATION
OF LCD MODULE

MODULE NO.: XY016I WV8788ANT

Customer Name:			
Customer Part Number:			
Approved By:		Date:	

Prepared By	Checked By	Approved By

Table of Contents

Revision History	3
1 General Specifications	4
2 Pin Assignment.....	5
3 Absolute Maximum Ratings	6
4 Electrical Characteristics	6
5 INTERFACE TIMING	8
5.1 System Bus Read/Write Characteristics.	8
5.2 Power ON/OFF Timing	10
6 Optical Characteristics	11
7 Environmental / Reliability Test.....	15
8 Mechanical Drawing	16
9 Precautions For Use of LCD Modules	17

Revision History

Rev	Issued Date	Description	Page	Editor
1.0	Mar.09,2024	First release	All	

1 General Specifications

Feature		Specifications
Display Spec.	LCD type	1.6 inch
	Resolution (H*V)	400(RGB) *400
	Technology Type	a-Si TFT
	Pixel Configuration	R.G.B. Vertical Stripe
	Display Mode	IPS/Transmissive/Normally Black
	Viewing Direction	All
	Gray Scale Inversion Direction	--
Mechanical Characteristics	OutlineDimensions (W x H x T) (mm)	42.94(H) *45.89(V)*2.09(T)
	Active Area(mm)	39.84 (H)*39.84(V)
	With /Without Touch screen	Without
	Match Connector Type	0.5 Pitch 16 Pin
	Backlight Type	White LED
	Weight (g)	TBD
Electrical Characteristics	Interface	MIPI 1LINE
	Number of color	16.7M
	Driver IC	ST7797

2 Pin Assignment

NO.	PIN NAME	Description
1	LEDK	LED Cathode
2	LEDK	LED Cathode
3	LEDA	LEDA
4	LEDA	LEDA
5	GND	Ground
6	VCC 2.8	Power Supply 2.8~3.3V
7	IOVCC 1.8	Power Supply 1.8V-2.0V
8	GND	Ground
9	RESET	LCM reset signals
10	GND	Ground
11	TCP	DSI-Clock+
12	TCN	DSI-Clock-
13	GND	Ground
14	D0P	DSI-D0+ data signals
15	TD0N	DSI-D0- data signals
16	GND	Ground

3 Absolute Maximum Ratings

GND=0V, Ta= 25°C

Item	Symbol	Value	Unit
Power supply voltage for logic	V _{DD}	0.3~3.3	V
Input voltage	V _{in}	V _{DD} +0.3	V
Operating temperature	T _{opr}	-20 to 70	C
Storage temperature	T _{stg}	-30 to 80	C

4 Electrical Characteristics

4.1 Driving TFT LCD Panel

GND=0V, Ta=25°C

Item	Symbol	Min	Type	Max	Unit	Test condition
Operating voltage	V _{DD}	2.6	2.8	3.3	V	-
Supply current	I _{DD}	-	-	30	mA	V _{DD} =2.8V, Ta=25 C
Input voltage	V _{IH}	0.8V _{DD}	-	V _{DD}	V	-
	V _{IL}	0	-	0.2V _{DD}	V	
Input leakage current	I _{IL}	-1.0	-	1.0	A	V _{IN} =V _{DD} or V _{SS}

Note: Voltage greater than above may damage the module.

All voltages are specified relative to VSS=0V.


4.2 Driving Backlight

Ta=25°C

Item	Symbol	Min	Typ	Max	Unit	Remark
Forward Current	I _F	--	60	-	mA	
Forward Voltage	V _F	-	6.6	-	V	
Connection mode	P	--	3P	--		
LED number	/		3		pcs	
LED life time		20000			hours	


Note1: Optical performance should be evaluated at Ta=25°C only .If LED is driven by high current, high ambient temperature & humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

4.3 Block Diagram

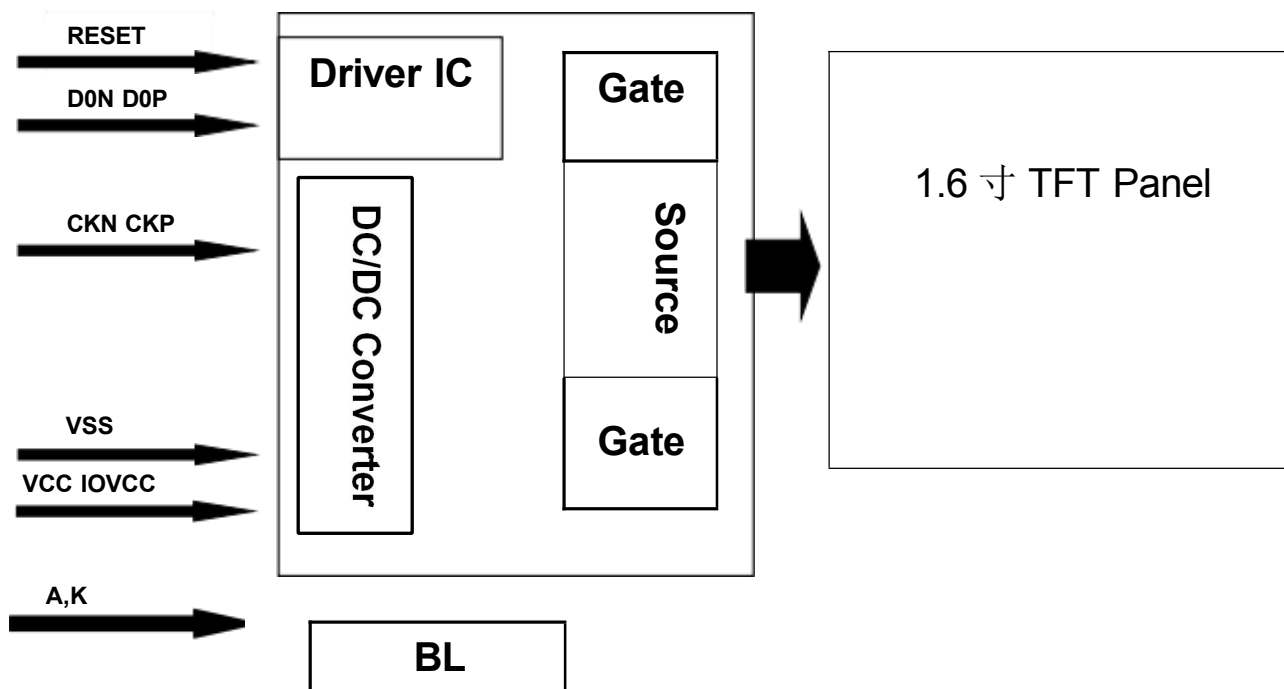

5 INTERFACE TIMING

5.1 DSI Interface Timing Characteristics.

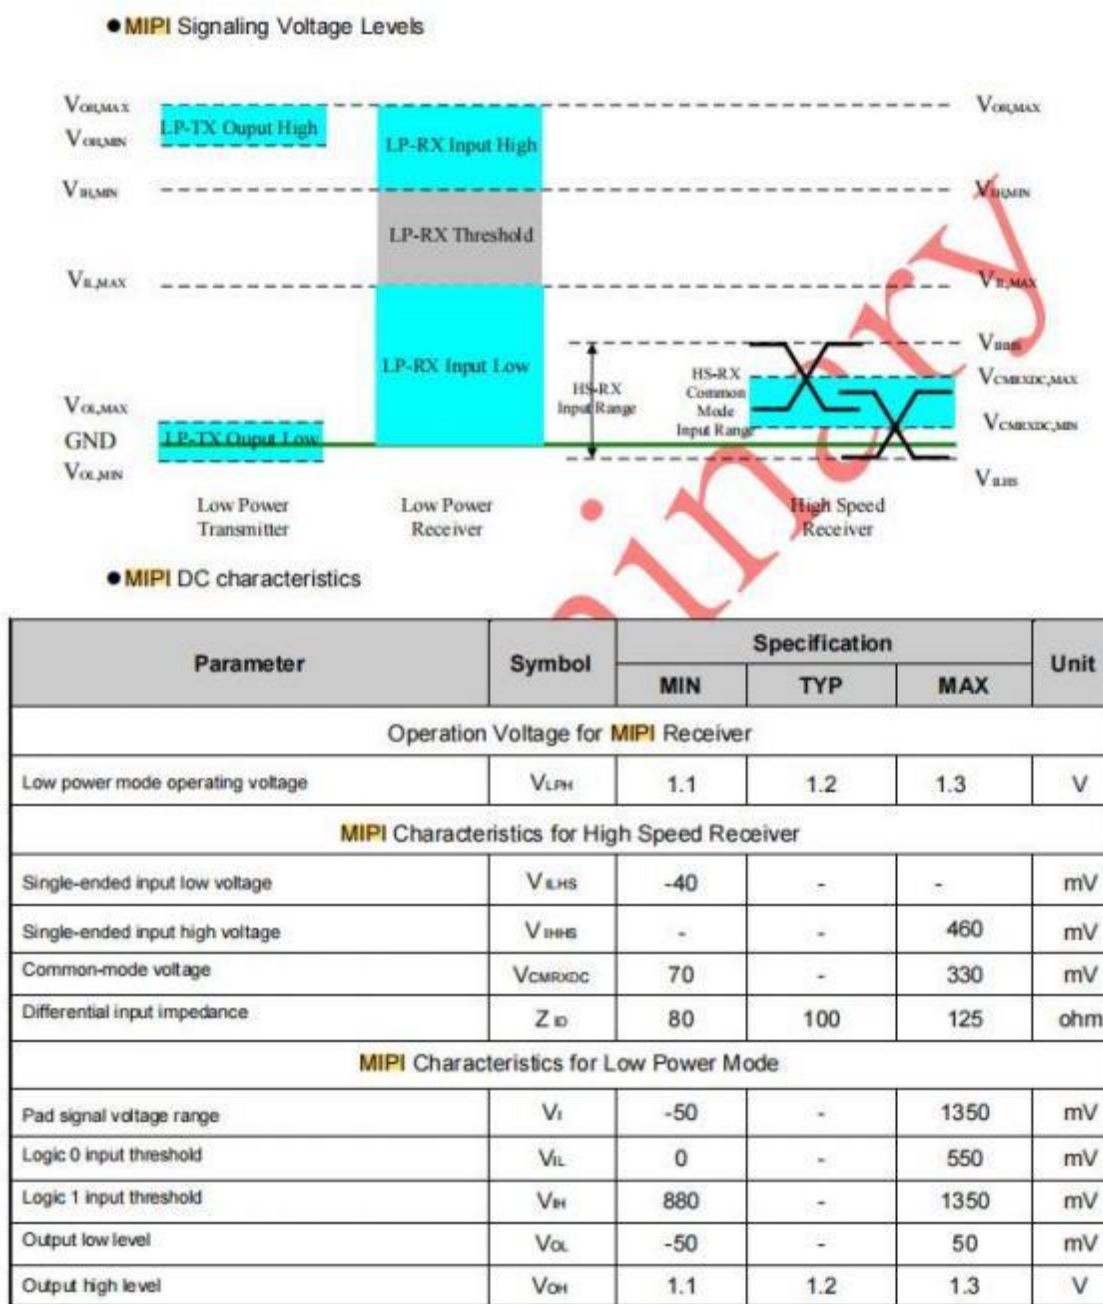



Rising and falling time on clock and data channel

DC characteristics for Panel Driving


Parameter	Symbol	Condition	Specification			Unit	Related Pins
			MIN.	TYP.	MAX.		
Power & Operation Voltage							
System Voltage	VDD	Operating voltage	2.65	2.8	3.3	V	-
Interface Operation Voltage	VDDI	I/O Supply Voltage	1.65	1.8	3.3	V	-
Gate Driver High Voltage	VGH	-	11.0	-	15.5	V	-
Gate Driver Low Voltage	VGL	-	-11.7	-	-8.4	V	-
Gate Driver Supply Voltage	-	VGH-VGL	-	-	27.2	V	-
Input / Output							
Logic-High Input Voltage	VIH	-	0.7VDDI	-	VDDI	V	Note 1
Logic-Low Input Voltage	VIL	-	GND	-	0.3VDDI	V	Note 1
Logic-High Output Voltage	VOH	IOH = -1.0mA	0.8VDDI	-	VDDI	V	Note 1
Logic-Low Output Voltage	VOL	IOL = +1.0mA	GND	-	0.2VDDI	V	Note 1
Logic-High Input Current	IiH	VIN = VDDI	-	-	1	uA	Note 1
Logic-Low Input Current	IiL	VIN = GND	-1	-	-	uA	Note 1
Input Leakage Current	IIL	IOH = -1.0mA	-0.1	-	+0.1	uA	Note 1
VCOM Voltage							
VCOM Voltage	VCOM	-	-	GND	-	V	-
Source Driver							
Gamma Reference Voltage(Positive)	VAP	-	3.65	-	6.2	V	-
Gamma Reference Voltage(Negative)	VAN	-	-4.2	-	-1.875	-	-
Source Output Settling Time	Tr	Below with 99% precision	-	-	20	us	Note 2
Output Offset Voltage	VOFFSET	-	-	-	35	mV	Note 3

Basic DC Characteristics

5.2 Power ON/OFF Timing

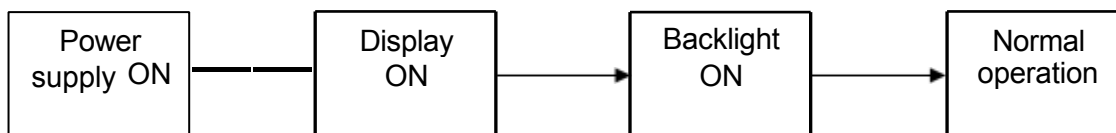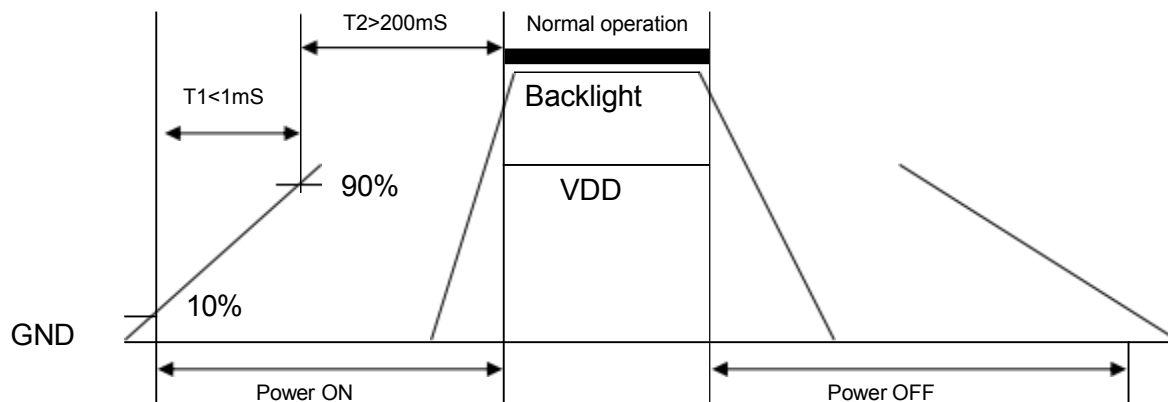

Power ON sequence

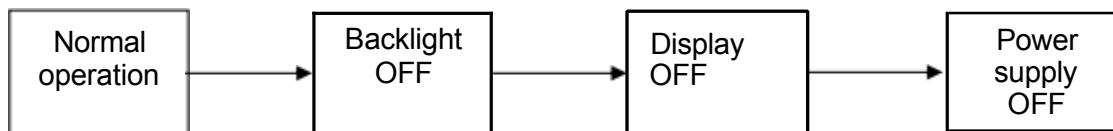

Power OFF sequence

6 Optical Characteristics

Ta=25℃


Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
View Angles	θT	$CR \geq 10$		85	-	Degree	Note 2
	θB			85	-		
	θL			85	-		
	θR			85	-		
Contrast Ratio	CR	$\theta=0^\circ$	800	1000	-	-	Note1 Note3
Response Time	T_{ON}	25℃	-	30	40	ms	Note1 Note4
	T_{OFF}						
Uniformity	U	-	-	-	-	%	Note1 Note6
NTSC	-	-	60	65	-	%	Note 5
Luminance	L		-	650	-	cd/m ²	Note1 Note7

Test Conditions: $V_F=6.6\text{ V}$, $I_F=60\text{mA}$, the ambient temperature is 25℃.

- The test systems refer to Note 1 and Note 2.

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

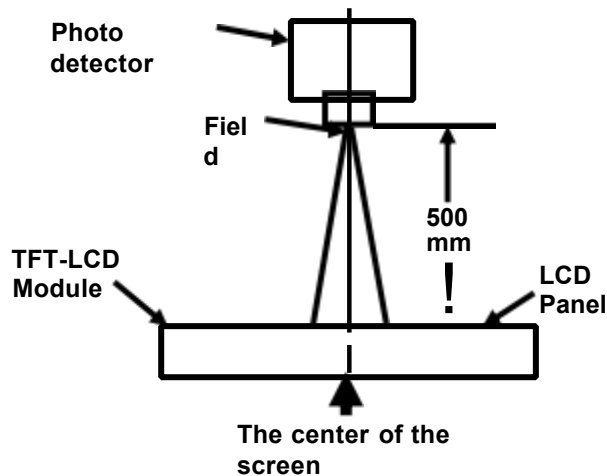

Item	Photo detector	Field
Contrast Ratio	SR-3A	1°
Luminance		
Chromaticity		
Lum Uniformity		
Response Time	BM-7A	2°

Note 2: Definition of viewing angle range and measurement system.

viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80)。

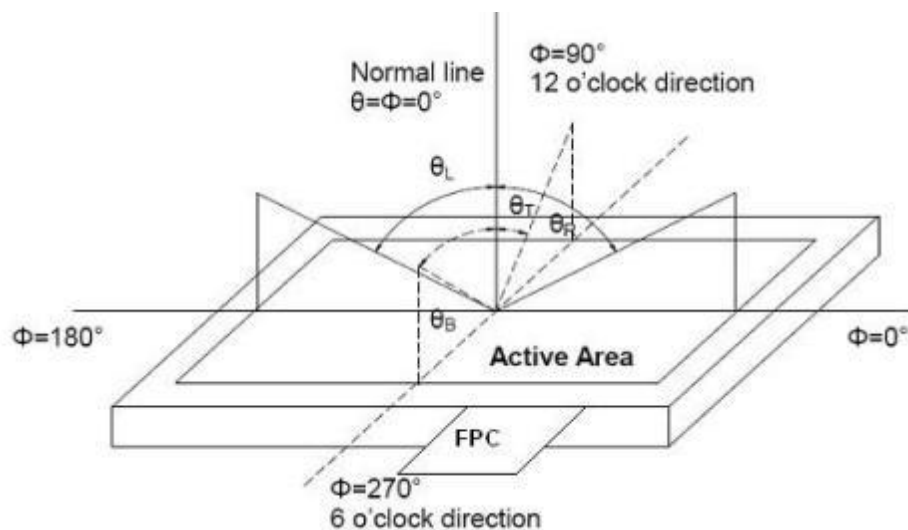


Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$


“White state “:The state is that the LCD should be driven by V_{white}.

“Black state”: The state is that the LCD should be driven by V_{black}.

V_{white}: To be determined V_{black}: To be determined.

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

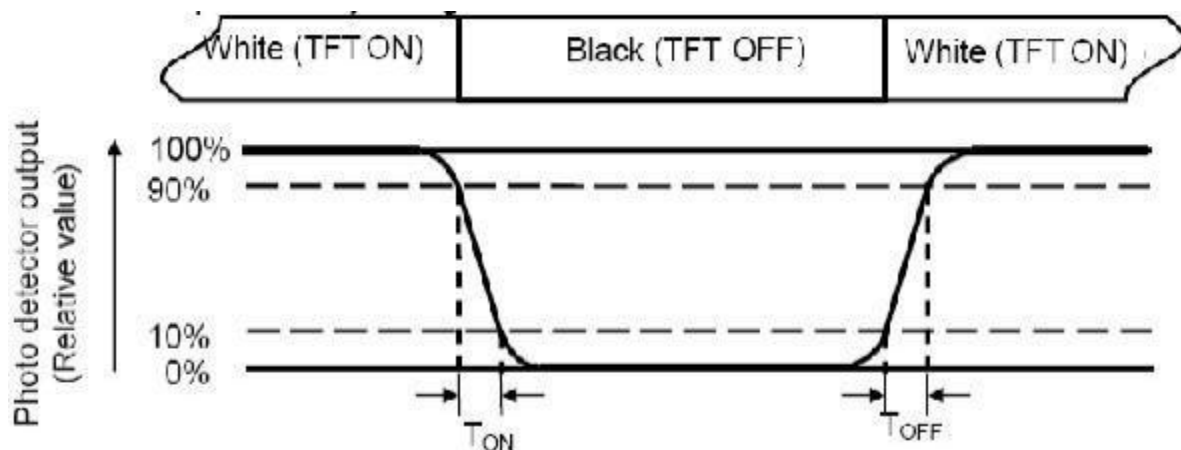

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (U)} = L_{\min} / L_{\max}$$

L-----Active area length W----- Active area width

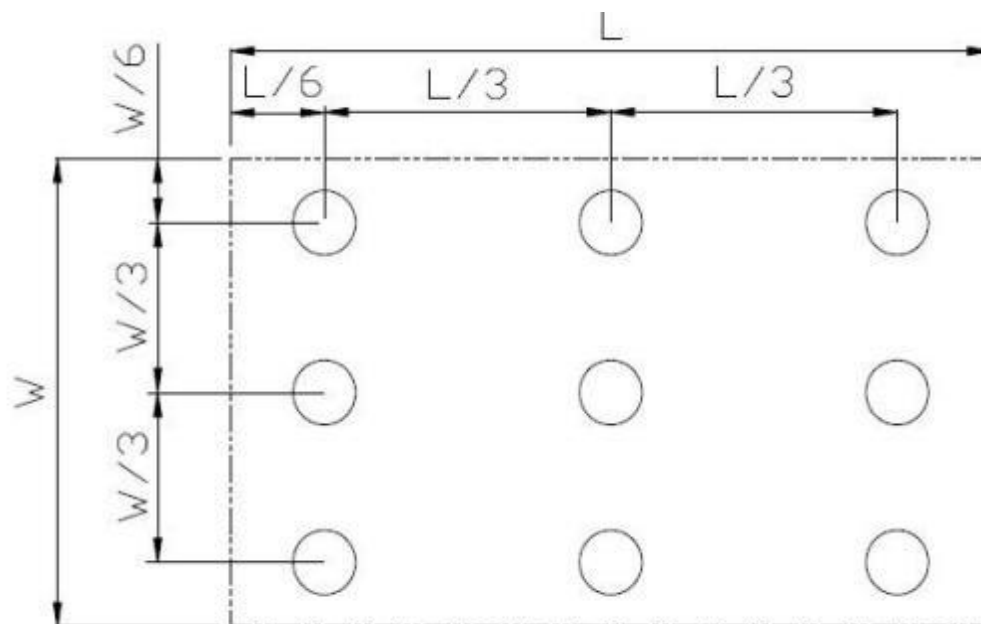


Fig. 2 Definition of uniformity

$L_{\max}$: The measured maximum luminance of all measurement position.

$L_{\min}$: The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance:

Measure the luminance of white state at center point.

7 Environmental / Reliability Test


Item	Condition	Time (hrs)	Assessment
High temp. Storage	80 C	120	No abnormalities in functions and appearance
High temp. Operating	70 C	120	
Low temp. Storage	-30 C	120	
Low temp. Operating	-20 C	120	
Humidity	60 C/ 90%RH	120	
Thermal Shock(Non-operation)	-20 C 25 C 70 C (0.5 hour 5 min 0.5 hour)	10cycles	

Remark:

- 1.The test samples should be applied to only one test item.
- 2.Sample size for each test item is 1~10pcs.
- 3.In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

RoHS

视图

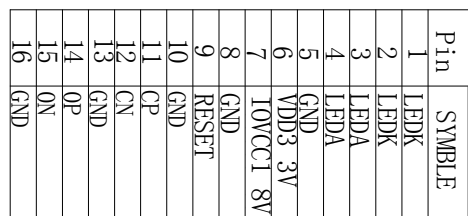

LED CIRCUIT DIAGRAM:

17-20mA
V1=0.6V

标示	日期	更改内容	签署

Please Confirm This Drawing On/Before
请 签 回 此 图

9 Precautions For Use of LCD Modules

9.1 Handling Precautions

9.1.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

9.1.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

9.1.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

9.1.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

9.1.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

9.1.1.6 Do not attempt to disassemble the LCD Module.

9.1.1.7 If the logic circuit power is off, do not apply the input signals.

9.1.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

9.1.1.9 Be sure to ground the body when handling the LCD Modules.

9.1.1.10 Tools required for assembly, such as soldering irons, must be properly ground.

9.1.1.11 To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

9.1.1.12 The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

9.1.1.13 Storage precautions

9.1.1.14 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

9.1.1.15 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

9.1.1.16 The LCD modules should be stored in the room without acid, alkali and harmful gas.

9.2 Transportation Precautions

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.