

FFM-U8038-20K

sanitary ultrafiltration membrane

PRODUCT	Membrane Chemistry:	Patent polyethersulfone (PES)
DESCRIPTION	Nominal retention accuracy:	20, 000 Dalton
	structure:	Roll type sanitary belt grid
	Choice scope: Diameter:	2.5 ", 4" and 8 "; inlet passage: (31mil), (46mil), (62mil), (80mil)

Specification

Parameter	Effective membrane area					
	(31mil)	(46mil)	(62mil)	(80mil)	(100mil)	(135mil)
	ft2 (m2)	ft2 (m2)	ft2 (m2)	ft2 (m2)	ft2 (m2)	ft2 (m2)
	370 (34.3)	276 (25.6)	215 (20.0)	--	--	--

Not all combinations are covered. Our company can customize special specifications of membrane components for users.

OPERATION PARAMETERS

Recommended operating pressure: 30-120 psi (2.1-8.3bar)

Maximum operating pressure: 140psi (9.7bar)

Operating temperature range: 41-131° F (5-55°C)

Cleaning temperature range: 104-122° F (40-50°C)

PH range of continuous operation: 2.0-10.0 (25°C)


PH range of online cleaning: 1.8-11.0 (25°C)

Design pressure drop of single membrane element:

Runner 31mil: 12-15 psi (0.8-1.0 bar)

Runner 46mil: 15-20 psi (1.0-1.4 bar)

Other Runner: 15-25 psi (1.0-1.7 bar)

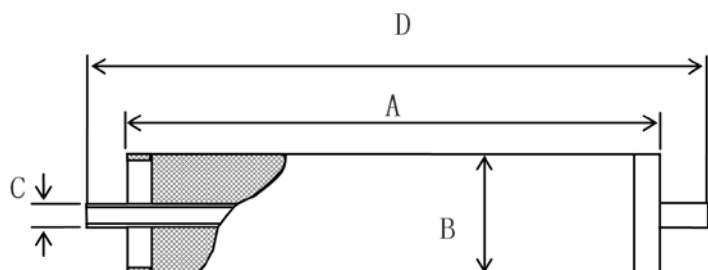

A	B	C	D
inch (mm)	inch (mm)	inch (mm)	inch (mm)
38.0 (965)	7.9 (201)	1.138 (28.9)	--